



CERTIFICATE OF MAILING BY "EXPRESS MAIL"

"Express Mail" Mailing Label No. EM033395473US, Date of Deposit July 17, 1997.
I hereby certify that this paper or fee is being deposited with the United States Postal
Services "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the
date indicated above and is addressed to the Assistant Commissioner for Patents,
Washington, D.C. 20231

Helen A. Ford

(Typed or Printed Name of Person Mailing Paper or Fee)

[Signature]
(Signature of Person Mailing Paper or Fee)

PATENT
Attorney Docket No. 17882.706

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT
APPLICATION TRANSMITTAL LETTER

Asst. Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Sir:

Enclosed for filing is ☐ an original patent application, ☐ a continuation-in-part patent
application, or ☒ a patent application claiming the benefit of Provisional Application No: 60/037,283
filed February 4, 1997, by Richard Wisniewski, Leonidas Cartwright Leonard, for **FREEZING AND**
THAWING VESSEL WITH THERMAL BRIDGE FORMED BETWEEN HEAT EXCHANGE
MEMBERS.

No. of pages in Specification: 28; No. of Claims: 35.

No. of Sheets of Drawings: 18; Formal: , Informal: X.

Also enclosed are:

- ☐ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 in
- ☐ a separate document ☐ the declaration;
- ☐ a certified copy of the priority document;
- ☐ an Associate Power of Attorney;
- ☐ verified statement(s) claiming small entity status;
- ☐ an Assignment document and form PTO-1595.

The declaration of the inventor(s) ☐ also is enclosed ☒ will follow.

The fee has been calculated as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$770.00
Total Claims	35	MINUS 20 =	15	\$22.00=	\$330.00
Independent Claims	1	MINUS 3 =	0	\$80.00=	\$0
If multiple dependent claims are presented, add \$260.00					0
Total Application Fee					\$1,100.00
If verified statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					
Add Recording Fee of \$40.00 if Assignment document is enclosed					0
TOTAL APPLICATION FEE DUE					\$1,100.00


☐ A check in the amount of \$___ is enclosed.

☒ Charge \$1,100.00 to Deposit Account No. 23-2415.

The Commissioner is hereby authorized to charge any additional fees that may be required by this paper, and to credit any overpayment, to Deposit Account No. 23-2415
(Our Docket No. 17882-706). A duplicate of this paper is enclosed.

Please direct all correspondence concerning the above-identified application to the following address:

Paul Davis
Wilson Sonsini Goodrich & Rosati
650 Page Mill Road
Palo Alto, CA 94304

Respectfully submitted,
WILSON SONSINI GOODRICH & ROSATI
By 
Paul Davis
Registration No. 29,294

650 Page Mill Road
Palo Alto, CA 94304-1050
(415) 493-9300
Date: July 17, 1997

**Freezing and Thawing Vessel with Thermal Bridge Formed Between Heat
Exchange Members**

Inventors: Richard Wisniewski, Leonidas Cartwright Leonard

Cross-Reference to Related Applications

This application claims the benefit of Provisional Application Serial
No. 60/037,283, filed February 4, 1997, hereby incorporated by reference.
The present application is related to U.S. Patent Application Serial No.
_____, (Attorney Docket No. 17882.702), filed July 17, 1997,
entitled "Freezing and Thawing Vessel with Thermal Bridge Formed Between
Internal Structure and Heat Exchange Member," having same named inventors
Richard Wisniewski, Leonidas Cartwright Leonard, hereby incorporated by
reference and U.S. Patent Application Serial No. _____, (Attorney
Docket No. 17882.705), filed July 17, 1997, entitled "Freezing and Thawing
Vessel with Thermal Bridge Formed Between Container and Heat Exchange
Memeber," having same named inventors Richard Wisniewski, Leonidas
Cartwright Leonard, hereby incorporated by reference.

1. Field of the Invention

The present invention relates generally to systems containing structures
such as fins to aid in the transfer of heat into or out of a medium. More
particularly, the present invention relates to heating and cooling structures
which are suited for use in heat, cooling, thawing, and freezing
biopharmaceutical products.

2. Description of the Prior Art

Typically, a container used to heat or cool a medium will have a heat exchange fluid circulated in tubes placed in or around the exterior of the container. In order to improve the transfer of heat to or from the medium to the heat exchange fluid, one or more extensions of the container or any structures in the container may be used to increase the surface area of the system that is in contact with the medium.

Ordinarily, fins will be attached by one end to a portion of the container or some other structure in the container, and the fins will conduct heat to or from that portion of the container. However, since a fin is typically attached to the container or an internal structure at only one point, all of the heat transferred to or from the fin to the container or an internal structure must enter or leave the fin through the one connection that the fin has with the rest of the system.

One configuration that has been used to solve this problem is to build a system in which one or more of the fins are rigidly attached to both the container and an internal structure within the container. This allows heat to be transferred to or from a fin through two portions of the fin, increasing the rate at which heat is put into or withdrawn from a medium placed in the container.

However, by rigidly attaching a fin between the container and a structure within the container, the structure within the container itself then becomes rigidly attached to the container. The rigid attachment of the structure inside the container can make cleaning and decontaminating the container more difficult. Additionally, it may be more difficult to manufacture the system because, for example, tighter tolerances may be required so that the fin can be attached to two surfaces within the container, and each fin may require two or more welded joints. Furthermore, it may be inconvenient, costly, or impossible for fins made of certain materials to be welded to a container.

What is needed is a system in which heat can be put into or withdrawn from a fin through more than one portion of the fin while the system is operating while enabling structures within the container to be removed to allow for cleaning and decontaminating of the system. Furthermore, what is needed is a system in which it is not required to physically connect or weld the fin to a portion of the container in order for heat to be transferred into or out of a portion of the fin.

SUMMARY OF THE INVENTION

It is an object of the present invention to have a system in which heat can be transferred into or out of a system through heat conduction pathways which are partially comprised of the medium being heated or cooled such that heat flows between different portions of the system by flowing through the medium.

It is an object of the present invention to have a system in which heat can be transferred into or out of a structure within the container (e.g. a fin) through more than one portion of the structure. (The term "fin" will be used generically to mean any heat exchange member of the system that extends into the medium, including but not limited to a coil, a flattened protrusion, a tube, or any other structure extending into the container. Where a particular type of extension of the container is being discussed, such as a coil, the name of the particular type of extension may be used to help clarify the configuration of the system.)

It is a further object of the present invention to have a system in which structures within the container can be removed to allow for cleaning and decontaminating of the system.

It is yet a further object of the present invention to have fins which contain passageways allowing cooling fluid to flow within the fins.

It is another object of the present invention to have fins which enhance the removal of heat from a medium but which are not rigidly attached to another portion of the system.

It is yet another object of the present invention to have fins which have non-uniform cross-sections to allow for more rapid removal of heat from a medium in the system.

It is still another object of the present invention to have a system that achieves controlled freezing rates for a medium such as a pharmaceutical product to aid in cryopreservation.

It is a yet another object of the present invention to have a system which encourages a controlled freezing process to promote dendritic ice growth to aid in the cryopreservation of mediums including but not limited to proteins, cells, blood, plasma, other biopharmaceutical products, or food products.

It is a further object of the present invention to have a system that can rapidly heat or cool a medium.

These and other objects of the present invention are achieved by the use of a structure positioned inside the container placed inside the container. A first heat exchange member is at least partially coupled to an interior surface of the container. A second heat exchange member at least partially coupled to the structure wherein a portion of the first heat exchange member is placed in close proximity to a portion of the second heat exchange member to aid formation of a thermal transfer bridge that improves conduction of heat into or out of the medium.

In one embodiment of the present invention, the structure and the second heat exchange member can be removed from the system to aid in cleaning since they are not rigidly attached to the container or the first heat exchange member

When a medium inside the container is frozen, a bridge made of the frozen medium will form between the distal end of the fin and the portion of

the container close to the distal end of the fin. This bridge will allow heat to be conducted to or from the fin across the bridge speeding the removal of heat from the medium.

5 In one embodiment of the present invention, the fin is at least partially attached to a structure within the container allowing heat to be transferred out of the fin through the attachment point and the thermal bridge when it is formed.

10 In another embodiment of the present invention, the distal end of the fin is placed close enough to another surface of the container, for example, another fin or structure in the container, such that when the medium is cooled, the thermal transport bridge is formed between the fin and the other structure in the container -- which may of course be a fin.

15 The present invention is useful for both the cooling and heating of a medium. When a medium is being frozen the thermal bridges help transfer heat out of the medium. When the medium is being heated the thermal bridges help heat to be transferred into the medium.

20 The medium can also be a gas being converted to a liquid or a liquid being converted to a gas. In these cases the liquid phase of the medium that collects between the fin and the structure will act as the thermal bridge to enhance the conduction of heat between the fin and the structure.

25 Additionally, the fin can have structures on it which will enhance the formation of solid or liquid thermal bridges and/or enhance the heat conduction through such bridges. For example, a portion of the fin may be enlarged to provide more surface area for conduction and contact with a thermal bridge, or the fin may be tailored to enhance nucleation of the solid or condensation of the liquid. Also, a fin may have a non-uniform cross-section to enhance thermal transport or achieve desired thermal transport characteristics. This may be desirable to help achieve cryobiology protocols. Furthermore, the fin can have interior channels that allow a heat exchange

medium to flow within at least a portion of the fin. Other variations are possible without departing from the spirit of the invention.

The system may be configured so that a heating or cooling device is coupled to any portion of the container. For example, without departing from the present invention, a heater or cooler could be attached to an exterior portion of the container (e.g. a wall of the container), to an internal structure of the container, or directly to one or more of the fins.

In general, the system should be constructed such that the distance to be bridged by the thermal transport bridge will be a function of the thermal properties of the medium and the system, manufacturing requirements and construction processes used to build the system, and other relevant parameters of the system and components used. The size of the gap to be filled by the bridge can be determined through simple trial and error, and the optimum gap may be no gap.

In one aspect of the present invention, the fins may be structures of any shape which are placed against or wedged between surfaces in the container. Thermal bridges will then form between the fins and the adjacent surface or surfaces of the container. For example, the fins can have ends adapted to fit in preconfigured slots in surfaces of the container. In this way the fins can be reconfigurable attached to portions of the container so that the number, configuration, and type of the fins used can be easily changed to meet changing manufacturing, process, or protocol needs.

In one aspect of the present invention, the optimum gap is proportional to the thickness of the fin. In another aspect of the present invention, the optimum gap is less than 2 inches, preferably less than 1 inch, more preferably less than 1/2 inch, even more preferably less than 1/4 inch, and most preferably less than 1/8 inch.

Without departing from the present invention, the container can be porous and need not have a top or a bottom. The medium can be heated or cooled as it passes through the container. Additionally, the container used in

the present invention is not limited in shape, size or material from which it is constructed. In one aspect of the present invention, the container may have a volume of 1 liter to 5 liters, 1 liter to 250 liters, or 250 to 10,000 liters.

The present invention can be usefully applied in many fields. For example in the biopharmaceutical industry the present invention can be used to freeze and preserve a variety of biopharmaceutical products, including but not limited to proteins, cells, antibodies, medicines, plasma, blood, buffer solutions, viruses, serum, cell fragments, cellular components, and any other biopharmaceutical product.

Additionally, the present invention allows processing of such biopharmaceutical products consistent with generally accepted manufacturing procedures.

One could use the present invention to freeze a biopharmaceutical product by sterilizing the container, pumping the product to be frozen into the container through a sterile filter and then removing heat from the product using the present invention to freeze the product within the container.

The present invention promotes uniform freezing at a rapid pace which allows the product in the container to be frozen in as close to its native state as possible. Additionally, the present invention allows the freezing process to be done in a repeatable fashion so that a user can be assured that the freezing process is not causing batch to batch variations in the product. This allows the end use of the product to be decoupled from the manufacturing steps needed to create the product since the product can be stored in the frozen state after it is manufactured, and thawed when and where it is needed.

The present invention can also be used during any stage of a purification process. For example, after products are processed using size separation or affinity separation, fermentation, licing, concentration filtration, selective affinity chromatography, removal of micro contaminants or low level impurities through ion exchange, viral filtration, chromatography, putting the product in a buffered solution delivery system, or after any other processing

step the resulting product can be stored using the present invention. This allows a hold to be put on the manufacturing process without degrading the intermediate product.

For example, if during a manufacturing process in which various components are being separated, one wishes to put a hold on the processing, there may be contaminating proteases in the intermediate product which may, over time, degrade some of the proteins of interest in the product. The present invention can be used to freeze the intermediate product quickly and uniformly enough so that the product remains close to its native state. The molecules in the product are not brought significantly closer together--freeze concentration is reduced, and unwanted reactions can be slowed or stopped.

Thus, the present invention can be used to increase the flexibility of a manufacturing process, making planning and scheduling of the process easier. Intermediate products can be frozen for later processing or shipping. Additionally, since the present invention can be scaled to any size desired, large batches of products can be prepared all at once, preserved using the present invention, and used as needed at a later time.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a side view of the finned heating and cooling apparatus.

Figure 2 is a top view of the fins and the structure within the container depicted in Figure 1.

Figure 3 depicts the formation of thermal bridges and graphs showing the temperature profile of various cross-sections of the container and medium.

Figure 4 is another possible arrangement of the fins.

Figure 5 is yet another possible arrangement of the fins.

Figure 6 depicts a number of possible fin geometries and combinations.

Figure 7 depicts yet more possible fin geometries and combinations.

Figure 8 depicts still another possible configuration of fin geometries and combinations.

Figure 9 depicts a cross-sectional view of a fin showing a non-uniform thickness.

Figure 10 depicts a fins geometry which allows compartmentalization of the container through the use of alternate fin geometries.

Figure 11 is a cutaway view showing a container and the interior baffles of two fins.

Figure 12a is a top view of the container and fins of figure 11.

Figure 12b is a detail view of the distal end of a fin with an extension extending close to the interior wall of the container.

Figure 12c is a detail view showing another embodiment of a fin without an extension in which the hollow fins structure extends close to the interior wall of the container.

Figure 13 is a cutaway view showing a container, the interior baffles of two fins, and no central structure. The heat exchange fluid is fed into the fins through tubes in the top of the fins.

Figure 14a is a cutaway view showing a container, a set of interior fins, a set of exterior fins and a coil.

Figure 14b is a top view of the system of figure 14a.

Figure 15a is a cutaway view showing a container, a set of interior fins, a set of middle fins, a set of exterior fins, a first coil, and a second coil.

Figure 15b is a top view of the system of figure 15a.

Figure 15c is a detailed side view of the thermal bridges that form between each of the winds of the coils and between the fins and the winds of the coils.

Figure 15d is a detailed top view of the thermal bridges that form between the coils and the fins.

Figures 16 depicts non-circular cross-section tubes.

Figures 17 depict non-circular cross-section tubes in use in a system.

Figures 18 depict non-circular cross-section tubes attached to fins in various configurations.

Figures 19 depict non-circular cross-section tubes in use in a coil configuration within a system.

Figure 20 depicts a configuration of non-circular cross-section tubes and fins useful for compartmentalizing a system.

DETAILED DESCRIPTION

One embodiment of the present invention is shown in Figure 1.

Heating and cooling system 2 is comprised of container 4, fins 6 and structure

8. Fins 6 are configured such that they are placed in close proximity to interior surface 10 of container 4. Generally, a small gap between fin 6 and interior surface 10 is preferable. However, the size of this gap may be dictated by manufacturing tolerances, material parameters, or other practical considerations.

Figure 2 shows a cutaway top view of container 4, fins 6 and structure 8. In the present embodiment there are 6 fins placed symmetrically about structure 8. Any arrangement design, configuration, or number of fins could be used without departing from the present invention. For example, the fins need not be symmetrically positioned within the container, they need not be the same shape and they need not be made of the same material.

Referring again to Figure 1, structure 8 is heated or cooled by flowing a heat exchange fluid down interior passage 12 towards end piece 14. The heat exchange fluid then flows up through the outer passage 16 of structure 8. This flow pattern of the heat exchange fluid and the symmetric configuration of the fins about structure 8 aids system 2 to begin cooling the medium in the container from the bottom up. This is so because the heat exchange fluid is first closely coupled to the medium in the container and the fins at the bottom of the container.

Cooling the medium from the bottom up is particularly advantageous when a liquid medium is being frozen and, as is true for water, the density of the frozen medium is less than that of the liquid phase. Freezing from the

bottom up prevents pressure from building up as might be the case if the liquid phase was constrained by the solid phase.

It should be appreciated that one skilled in the art could use other flow patterns, fin shapes, and fin configurations to induce the medium to heat or cool in any preferred direction, uniformly, and/or at a specified rate without departing from the present invention. Additionally, parameters of the heat exchange fluid such as flow rate and/or temperature can be used to affect the rate at which the medium is cooled.

End piece 14 has bottom fin 30 attached to it. Bottom fin 30 functions the same as fins 6. A thermal transport bridge is formed between bottom fin 30 and a portion of interior surface 10.

In one aspect of the present invention, taper 19 on fin 6 helps to slow the formation of a thermal bridge on the upper portion of fin 6. This will slightly slow the heat transfer out of the upper portion of the container, allowing the system to freeze the medium from the bottom up. Such a taper can be used on any portion of the fin to help create a preferred direction for removal of heat from the container.

Container 4 has jacket 20 surrounding its circumference. Between exterior surface 18 of container 4 and jacket 20 is fluid flow path 22. Spiral baffle 24 corkscrews around container 4 between exterior surface 18 and jacket 20 forcing heat exchange fluid in fluid flow path 22 to flow in a spiraling path around the exterior surface 18 of container 4. Heat exchange fluid flows into fluid flow path 22 through port 26 and out through port 28 resulting in the heat exchange fluid flowing around container 4 from the bottom to the top. This flow pattern for the heat exchange fluid aids system 2 in cooling the medium in the container from the bottom up.

It should be appreciated that other fluid flow patterns and baffles can be used to induce the medium to heat or cool in any preferred direction, uniformly, and/or at a specified rate without departing from the present invention. Additionally, parameters of the heat exchange fluid such as flow

rate and/or temperature can be used to affect the rate at which the medium is cooled.

Furthermore, the heat exchange fluid can be flowed through the system at other points and in a time or process varying manner in order to tailor the timing, direction, and rate of heat flow into or out of the system. Additionally, materials used in, or the shape, or configuration of the system, including the fins, can be used to control parameters of the heating or cooling process such as rate, timing or directionality.

When container 4, structure 8 and fins 6 are cooled by the coolant, the medium in the container begins to cool. When the medium is sufficiently cooled, a portion of the medium between the distal end of fins 6 and interior surface 10 will freeze. This frozen bridge will allow heat to be conducted between fins 6 and container 4 through the frozen bridge. This will enable heat to be taken out of the medium at a higher rate, speeding the freezing of the medium in the container. The present invention will work with any type of medium including but not limited to biopharmaceutical products.

Figure 3 illustrates the formation of thermal bridges in accordance with one aspect of the present invention. Figure 3a is a top view of one embodiment of the present invention in which structure 31 has 8 fins 32 attached to it. Each fin 32 extends close to interior surface 33 of container 34.

Figure 3b illustrates a simulation for the system shortly after thermal bridges 35 have begun to form. In this simulation, the material properties of 315 stainless steel were used for the container and the fins, and the coolant temperature was -45 °C. The temperature of the liquid was -0.2 °C, the temperature of the fin in contact with the liquid was close to -0.2 °C, and the temperature of the portion of the fin in contact with the frozen product was declining toward the temperature of the wall. The temperature of the wall was within 2-5 °C of the temperature of the coolant.

As can be seen from the graphs in figure 3b, heat is being extracted from fins 32 through both ends. When compared to a finned structure in

which heat is extracted from only one end of the fin, the medium will be cooled at a faster rate. Figure 3c depicts the temperature profile of the medium within the compartments 36 formed by fins 32. As shown in the graphs in figure 3c, heat is withdrawn from the medium within the cavity through interior container wall 33, structure 31 and fins 32.

The relative uniformity with which the present invention allows heat to be removed from the medium promotes the growth of dendritic structures during the freezing process. The present invention, by allowing heat to be removed from both ends of a fin, helps to create a uniform temperature profile within the container. Additionally, the fins can be positioned to effectively segment the container into a plurality of smaller volumes, so that heat can be more uniformly removed from each segmented section. As an example, figure 2 shows container 4 segmented into 6 section by the fins.

It is noted that the present invention can be used to achieve dendritic ice growth even if fins are rigidly attached at more than one point to the system. Fins can be used to segment the container into small regions which can be more uniformly heated and cooled. Thus, if a particular application does not require that the internal structures of the container be removable, the fins and structures can be permanently attached within the container.

Dendritic ice growth is particularly useful many areas, including but not limited to the cryopreservation of biopharmaceutical products. As shown in Figure 3d, when heat is removed from surface 501 (which could be any surface of the present invention), dendrites 502 will form and grow moving away from surface 501. As dendrites 502 grow, the substance 503 in the medium being frozen and will eventually become surrounded by dendrites 502. As dendrites 502 grow, substance 503 will eventually become trapped in the frozen medium 504. By controlling the heat removal from surface 501, the growth rate of dendrites 502 can be controlled. Controlling the growth rate of dendrites 502 allows the present invention to be used to control the amount of liquid removed from substance 503 as it enters and becomes trapped by

growing dendritic front 505. It is noted that substance 503 can be any substance one desires to preserve.

It should be appreciated that there need not be active cooling of both the structure and the container to employ the present invention. Without departing from the present invention, coolant can be circulated through any part of the system, only one part of the system, or coolant need not be used and the system could be cooled by other means or indirectly or passively.

In another embodiment of the invention, removable liners can be placed over the distal ends of fins 6 to prevent them from contacting interior surface 10 when structure 8 and fins 6 are inserted or removed from container 4. This may be desired, for example, to avoid scratching interior surface 10 with fins 6 during assembly and disassembly.

Other fin configuration are possible without deviating from the present invention. For example, in Figure 4, fins 39 may be partially coupled to interior container wall 41 and the distal end of each fin can be place in close proximity to structure 37 such that the thermal bridge is formed between a distal end of each of fins 39 and structure 37.

In Figure 5, fins 40 are attached to interior surface 42. Fins 44 are attached to structure 46. System 38 is constructed such that portions of fins 40 and fins 44 are in contact, nearly in contact or can be rotated such that this is the case. Then, when the medium in the container freezes, thermal transport bridges will form between portions of fins 40 and fins 44. In another aspect of this invention, fins 40 and 44 need not be parallel. Fins 40 and 44 can be angled with respect to each other such that gap 45 varies along the length of fins 40 and 44.

Figure 6 depicts a number of possible arrangements of fins. For example, fin 48A may be partially coupled to structure 50A and a distal end placed in close proximity to another structure, 50B, such that the thermal bridge is formed between the distal end of fin 48A and structure 50B. Fins 54 are coupled to interior wall 56. A distal end of fin 54A is placed near distal

ends of fins 58, and fins 58 are coupled to structures 50. A thermal bridge will form between the distal ends of fins 54A, 58A and 58B. Thus, a thermal bridge can be formed between more than two fins. Forming a thermal bridge between two or more fins may be desirable if, for example, design constraints or other constraints require portions of the container to be held a distance from an actively cooled surface. A fin and thermal bridge can be used to help extract heat from the isolated structure.

Figure 7 depicts a number of other possible arrangements of fins. A fin can be configured so that the thermal bridge is formed not between the distal ends of two fins but between the distal end of one fin and some other portion of another fin. For example, fin 60 will form a thermal bridge with fin 62 at a central portion of fin 60, and fin 64 will form a thermal bridge with fin 66 at a central portion of fin 64. Furthermore, a fin need not be initially coupled to anything and thermal transport bridges may be formed between portions of the fin and other portion of the system. For example, fin 68 is not rigidly attached to any structure within the container, but it will form a thermal bridge with fins 64 and 70 and structures 72.

Additionally, fins may have structures on them to aid in the formation of thermal transport bridges or to enhance the thermal transport capabilities of the bridges. Fins 62 have extended surfaces 76 on their distal ends. Extended surface 76 will allow a wider thermal bridge to be formed, improving the heat transfer rate of the bridge. This may be desirable in certain circumstances. For example, the thermal transport properties of the fin material may be superior to those of the frozen material that forms the thermal bridge. Increasing the area of the thermal bridge will improve its total heat transfer properties.

Additionally, other types of extended surfaces can be put on fins, the structures or the interior surface of the container to aid in the formation of thermal transport bridges with the desired properties. For example, extended

surface 78 may be used to enhance the formation of a thermal bridge with fin 62 whether or not extended surface 76 is attached to fin 62.

Figure 8 shows another embodiment of the present invention. This embodiment details another configuration of fins in accordance with the present invention. In this embodiment fins 80 are connected to structure 81 and will form thermal bridges with structures 82. Fins 83 are connected to structures 82 and will form thermal bridges with interior container wall 84. Fins 85 will form thermal bridges with each other, and fins 86 will form thermal bridges with interior container wall 84

Figure 9 shows yet another embodiment of the present invention. Fin 87 has a non-uniform cross section along its length. Fin 87 is thicker at end 88 where it connects to structure 89 and thinner in its central portion. The fin then widens out at its distal end 90 where it is in close proximity to interior surface 91. A thermal bridge will form between distal end 90 and interior surface 91. The thicker base of the fin will allow more heat flux to be withdrawn from the fin at end 88 and distal end 90.

Figure 10 shows still another embodiment of the present invention. Fins 92 are attached to structure 93 and will form thermal bridges with container wall 94. Fins 92 are curved to form compartments 95. Compartmentalization of the container allows more uniform cooling to be achieved since the distance from any point in the medium to a cooled surface is reduced. Also, the reduction in distance between cooled surfaces can be used to decrease the time required to freeze a medium. Other fins such as fins 96 may be added to further compartmentalize compartments 95. Fins 97 can also be used to form thermal bridges with another structure 98. Those skilled in the art will realize that other shapes and configurations of fins can be used to create more or less compartments of any desired size, and that this scheme can be scaled to any desired container volume without departing from the present invention.

Figure 11 shows another embodiment of the present invention. In this embodiment fins 102 have interior passageways 104. Heat exchange fluid flows into interior passageways 104 through openings 106 in structure 108. Fins 102 may have dimples 110 or spacers 114 or turbulizers to help optimize the flow pattern 118 of the heat exchange fluid. Dimples or spacers help optimize the flow pattern 118 of the heat exchange fluid for reasons including, increasing the interior surface area of the fin which comes in contact with the heat exchange fluid, and giving the heat exchange fluid more time to absorb heat from the fins. This speeds the freezing process and allows converging of the dendrites more quickly.

In another aspect of the present invention, fins 102 may have extensions 120 on them. As shown in Figure 12a, heat exchange fluid does not flow within extensions 120. Extensions 120 are connected to fins 102 and extend close to interior surface 122 of container 124. Figure 12b shows a detail view of fin 102, extension 120 and interior surface 122. Figure 12c shows a detail view of another embodiment of the present invention in which there is no extension placed on the end of fin 102.

As show in figure 12b, when the present invention is used to freeze a medium within container 124, a thermal transfer bridge 126 will begin to form between interior surface 122 and extension 120. In figure 12c, the thermal transfer bridge will begin to form between fin 102 and interior surface 122.

Figure 13 shows yet another embodiment of the present invention. In this embodiment the heat exchange fluid flows into and out of fins 202 through tubes 204 connected to the top 206 of fins 202. In this embodiment the fins are not connected to a central structure. When this embodiment is used to freeze a medium, thermal transfer bridges 208 will form between the fins 202 and the interior surface 210 and between interior portions 212 of fins 202.

Figure 14a depicts yet another embodiment of the present invention. In this embodiment, system 300 has internal fins 304 which are attached to

structure 306. Heat exchange fluid flows through structure 306. The flow of the heat exchange fluid can be configured to be similar to the flow described for structure 8 in figure 1. Any other flow configuration can be used to achieve a desired cooling or heating rate. Additionally, heat exchange fluid may be flowed through interior fins 304 if desired.

Coil 308 is placed in a surrounding relationship to interior fins 304. Heat exchange fluid flows into coil 308 through input 310 and flows out through output 312. Exterior fins 314 are placed between coil 308 and interior surface 316 of container 302. In one aspect of this embodiment, exterior fins can be free standing, attached to coil 308 or attached to interior surface 316. In another aspect of this embodiment, heat exchange fluid can be flowed through exterior fins 314 through coil 308, interior surface 316, external inputs, or any other supply.

In this embodiment, thermal transport bridges are formed between interior fins 304 and coil 308, coil 308 and external fins 314, external fins 314 and interior surface 316, and the coils of coil 308.

Figure 14b show a top view of system 300. In this embodiment fins 314 are depicted as not being attached to coil 308. Fins 314 could be suspended by supports from the top or bottom of container 302 or fins 314 could be free standing.

Figure 15 depicts still another embodiment of the present invention. In this embodiment system 400 has internal fins 402 attached to structure 404 and first coil 406 surrounding internal fins 402. Middle fins 408 are placed around first coil 406 and second coil 410 surrounds middle fins 408. Exterior fins 412 are placed between second coil 410 and interior surface 414. First and second coils 406 and 410 receive heat exchange fluid through input 416 and 418 respectively and the heat exchange fluid flows out through outputs 420 and 422 respectively.

Figure 15b shows a top view of this embodiment. In this embodiment fins 408 and 412 are depicted as freely suspended. Thermal transport bridges

will form between internal fins 402 and first coil 406, the coils of first coil 406, first coil 406 and middle fins 408, middle fins 408 and second coil 410, the coils of second coil 410, second coil 410 and exterior fins 412, and exterior fins 412 and interior surface 414.

Figure 15c shows a detail side view of the formation of the thermal transport bridges 424 between the coils of one of first coil 406 or second coil 410, and the thermal transport bridges 426 formed between the coils and fins, interior fins middle fins or exterior fins. Distances X1 and X2 can be optimized as desired as a function of the properties of the fins the coil the medium and the container. The Figure 15d shows a top view of the formation of the thermal bridges depicted in figure 15c.

Figures 16 show other possible configurations of coils consistent with the present invention. In Figure 16a, central pipe 602 has a round cross section. Cooling fluid flows through the interior of pipe 602. Central pipe 602 is adjacent to and will form a thermal bridge with fin 604. Pipe 606 also has cooling fluid flowing through it, and it is adjacent to the other end of fin 604. Pipe 606 has a non-circular cross-section. Any cross-section pipe can be used consistent with the present invention. In figure 16b, a non-circular cross-section pipe 608 is show in a different orientation with respect to the adjacent fins.

Figure 17 shows non-circular cross-section pipes used in a system. In figure 17a, the angle formed between two adjacent fins is small and therefore the non-circular cross section pipes 610 are oriented so that they can be placed closer together. One advantage of using non-circular cross-section pipes is that the elongated surface area of non-circular pipes 610 allows for a longer portion of the interface between compartments 612 to be cooled by a pipe with a cooling medium flowing through it.

Figure 17b shows non-circular cross-section pipe 614 used in a different orientation from that in Figure 17a. In Figure 17b, the angle formed by adjacent fins is larger and therefore non-circular cross-section pipes 614

can be used in the orientation shown. In the orientation shown, non-circular cross-section pipes 614 protrude into the adjacent compartments and advantageously help to more uniformly cool the medium within the compartments.

5 Figure 18 shows another configuration of pipes and fins that is consistent with the present invention. In figure 18, the non-circular cross-section pipes 702 have fins 704 welded onto them.

10 Figures 19 show yet another example of the use of non-circular cross-section fins consistent with the present invention. In figure 19a a non-circular cross-section pipe 802 is wound into a coil, similar to coil 308 of figure 14a. Non-circular cross-section pipe 802 has extended flat side 804 adjacent to fins 806. Extended flat side 804 makes it easier for thermal bridges to form between coil 808 formed by pipes 802 and fins 806, and between pipes 802 of coil 808. Figure 19b shows pipes 810 of a different cross-section which also
15 advantageously aid in the formation of thermal bridges.

Non-circular cross-section pipes 802 or 810 allow fins 806 or fins 812 to be closer together for a given internal pipe cross-sectional area when compared to a circular pipe. Since the fins are closer together, thermal bridges will form more quickly, speeding up the freezing process and keeping it more
20 uniform.

Figure 20 details yet another possible configuration of non-circular cross-section pipes 902 and fins 904. The geometry shown can be used to compartmentalize large volume tanks. The compartments thus formed can be made as small as is needed in order to achieve a desired level of uniformity.

25 The present invention can be usefully applied in many fields. For example in the biopharmaceutical industry the present invention can be used to freeze and preserve a variety of biopharmaceutical products, including but not limited to proteins, cells, antibodies, medicines, plasma, blood, buffer solutions, viruses, serum, cell fragments, cellular components, and any other
30 biopharmaceutical product.

Additionally, the present invention allows processing of such biopharmaceutical products consistent with generally accepted manufacturing procedures.

One could use the present invention to freeze a biopharmaceutical product by sterilizing the container, pumping the product to be frozen into the container through a sterile filter and then removing heat from the product using the present invention to freeze the product within the container.

The present invention promotes uniform freezing at a rapid pace which allows the product in the container to be frozen in as close to its native state as possible. Additionally, the present invention allows the freezing process to be done in a repeatable fashion so that a user can be assured that the freezing process is not causing batch to batch variations in the product. This allows the end use of the product to be decoupled from the manufacturing steps needed to create the product since the product can be stored in the frozen state after it is manufactured, and thawed when and where it is needed.

The present invention can also be used during any stage of a purification process. For example, after products are processed using size separation or affinity separation, fermentation, licing, concentration filtration, selective affinity chromatography, removal of micro contaminants or low level impurities through ion exchange, viral filtration, chromatography, putting the product in a buffered solution delivery system, or after any other processing step the resulting product can be stored using the present invention. This allows a hold to be put on the manufacturing process without degrading the intermediate product.

For example, if during a manufacturing process in which various components are being separated, one wishes to put a hold on the processing, there may be contaminating proteases in the intermediate product which may, over time, degrade some of the proteins of interest in the product. The present invention can be used to freeze the intermediate product quickly and uniformly enough so that the product remains close to its native state. The molecules in

5

5

WHAT IS CLAIMED IS:

1. A thermal transfer system comprising:
 - a container for receiving a medium;
 - a structure positioned in said container;
 - a first heat exchange member at least partially coupled to an interior surface of said container;
 - a second heat exchange member at least partially coupled to said structure wherein a portion of said first heat exchange member is placed in close proximity to a portion of said second heat exchange member to aid formation of a thermal transfer bridge that improves conduction of heat into or out of the medium.
2. A thermal transfer system as in claim 1 wherein:
 - a heating or cooling device is coupled to and provides heating or cooling of said container.
3. A thermal transfer system as in claim 1 wherein:
 - a heating or cooling device is coupled to and provides heating or cooling of said structure positioned inside said container.
4. A thermal transfer system as in claim 1 wherein:
 - a heating or cooling device is coupled to and provides heating or cooling of said structure and said container.
5. A thermal transfer system as in claim 1 wherein:
 - there is a plurality of heat exchange members.
6. A thermal transfer system as in claim 1, further comprising:
 - a removable liner configured to cover at least a portion of said first heat exchange member.

1 7. A thermal transfer system as in claim 1, further comprising:
2 a removable liner configured to cover at least a portion of said second
3 heat exchange member.

1 8. A thermal transfer system as in claim 1, further comprising:
2 a removable liner configured to cover at least a portion of said first
3 heat exchange member and said second heat exchange member.

1 9. A thermal transfer system as in claim 1 wherein:
2 a volume of said container is in the range from substantially 1 liter to
3 250 liters.

1 10. A thermal transfer system as in claim 1 wherein:
2 a volume of said container is in the range from substantially 250 liter to
3 10,000 liters.

1 11. A thermal transfer system as in claim 1 wherein:
2 a distal end of said first heat exchange member contacts at least a
3 portion of a distal end of said second heat exchange member.

1 12. A thermal transfer system as in claim 1 wherein:
2 a distance between said distal end of said first heat exchange member
3 and a distal end of said second heat exchange member is a non-contacting
4 distance not greater than one inch.

1 13. A thermal transfer system as in claim 1 wherein:
2 the container comprises a jacket defining an interstitial space
3 positioned between the jacket and a wall of the container for receiving a flow

4 of a cooling fluid said jacket further including a plurality of spiral baffles for
5 enhancing thermal exchange between said fluid and said container.

1 14. A thermal transfer system as in claim 1 wherein:
2 said medium is substantially uniformly heated or cooled.

1 15. A thermal transfer system as in claim 1 wherein:
2 said medium is heated or cooled in substantially one direction relative
3 to said structure.

1 16. A thermal transfer system as in claim 1 wherein:
2 said heat exchange members are positioned to induce a thermal
3 gradient in said medium such that said thermal gradient is in a predetermined
4 direction.

1 17. A thermal transfer system as in claim 1 wherein:
2 said medium is heated or cooled in a predetermined direction.

1 18. A thermal transfer system as in claim 1 wherein:
2 said medium is heated or cooled such that the thermal gradient is in a
3 predetermined direction.

1 19. A thermal transfer system as in claim 1 wherein:
2 said medium is heated or cooled at a predetermined rate.

1 20. A thermal transfer system as in claim 1 wherein:
2 said medium is heated or cooled such that the thermal gradient is in a
3 predetermined direction and said heating or cooling occurs at a predetermined
4 rate.

1 21. A thermal transfer system as in claim 1 wherein:
2 said medium is a biopharmaceutical product.

1 22. A thermal transfer system as in claim 1 wherein:
2 said container has a nonporous bottom.

1 23. A thermal transfer system as in claim 1 wherein:
2 said container has nonporous walls.

1 24. A thermal transfer system as in claim 1 wherein:
2 said container has a top.

1 25. A thermal transfer system as in claim 1 wherein:
2 said container has a nonporous top.

1 26. A thermal transfer system as in claim 1 wherein:
2 a portion of said first heat exchange member is configured to improve
3 the thermal transport of said thermal transfer bridge.

1 27. A thermal transfer system as in claim 1 wherein:
2 a portion of said second heat exchange member is configured to
3 improve the thermal transport of said thermal transfer bridge.

1 28. A thermal transfer system as in claim 1 wherein:
2 a portion of said first heat exchange member is configured to improve
3 the thermal transport of said thermal transfer bridge and a portion of said
4 second heat exchange member is configured to improve the thermal transport
5 of said thermal transfer bridge.

1 29. A thermal transfer system as in claim 1 wherein:

2 said second heat exchange member is placed at an end of said structure.

30. A thermal transfer system as in claim 1 wherein:
 a heat exchange fluid flows within the structure.

1 31. A thermal transfer system as in claim 1 wherein:
2 a heat exchange fluid flows within the first heat exchange member.

3 32. A thermal transfer system as in claim 1 wherein:
4 an interior portion of the first heat exchange member has baffles.

1 33. A thermal transfer system as in claim 1 wherein:
2 the first heat exchange member is configured to maximize an area of a
3 surface of the heat exchange member that is in contact with the medium.

1 34. A thermal transfer system as in claim 1 wherein:
2 a heat exchange extension is at least partially coupled to the first heat
3 exchange member.

1 35. A thermal transfer system as in claim 1 wherein:
2 the medium includes proteins.

ABSTRACT OF THE DISCLOSURE

The present invention relates to a thermal transfer system for heating or cooling a medium. A structure is positioned inside a container placed inside the container. A first heat exchange member is at least partially coupled to an interior surface of the container. A second heat exchange member at least partially coupled to the structure wherein a portion of the first heat exchange member is placed in close proximity to a portion of the second heat exchange member to aid formation of a thermal transfer bridge that improves conduction of heat into or out of the medium.

5

10

0895936 071797

FIGURE 1

68588 U.S. PTO
08/895936
07/17/97




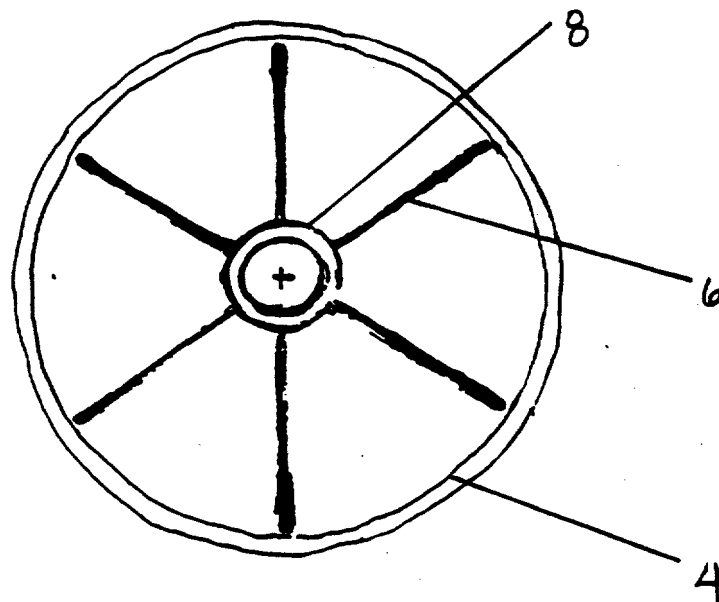


FIGURE 2

Vessel with
finned heat
exchanger

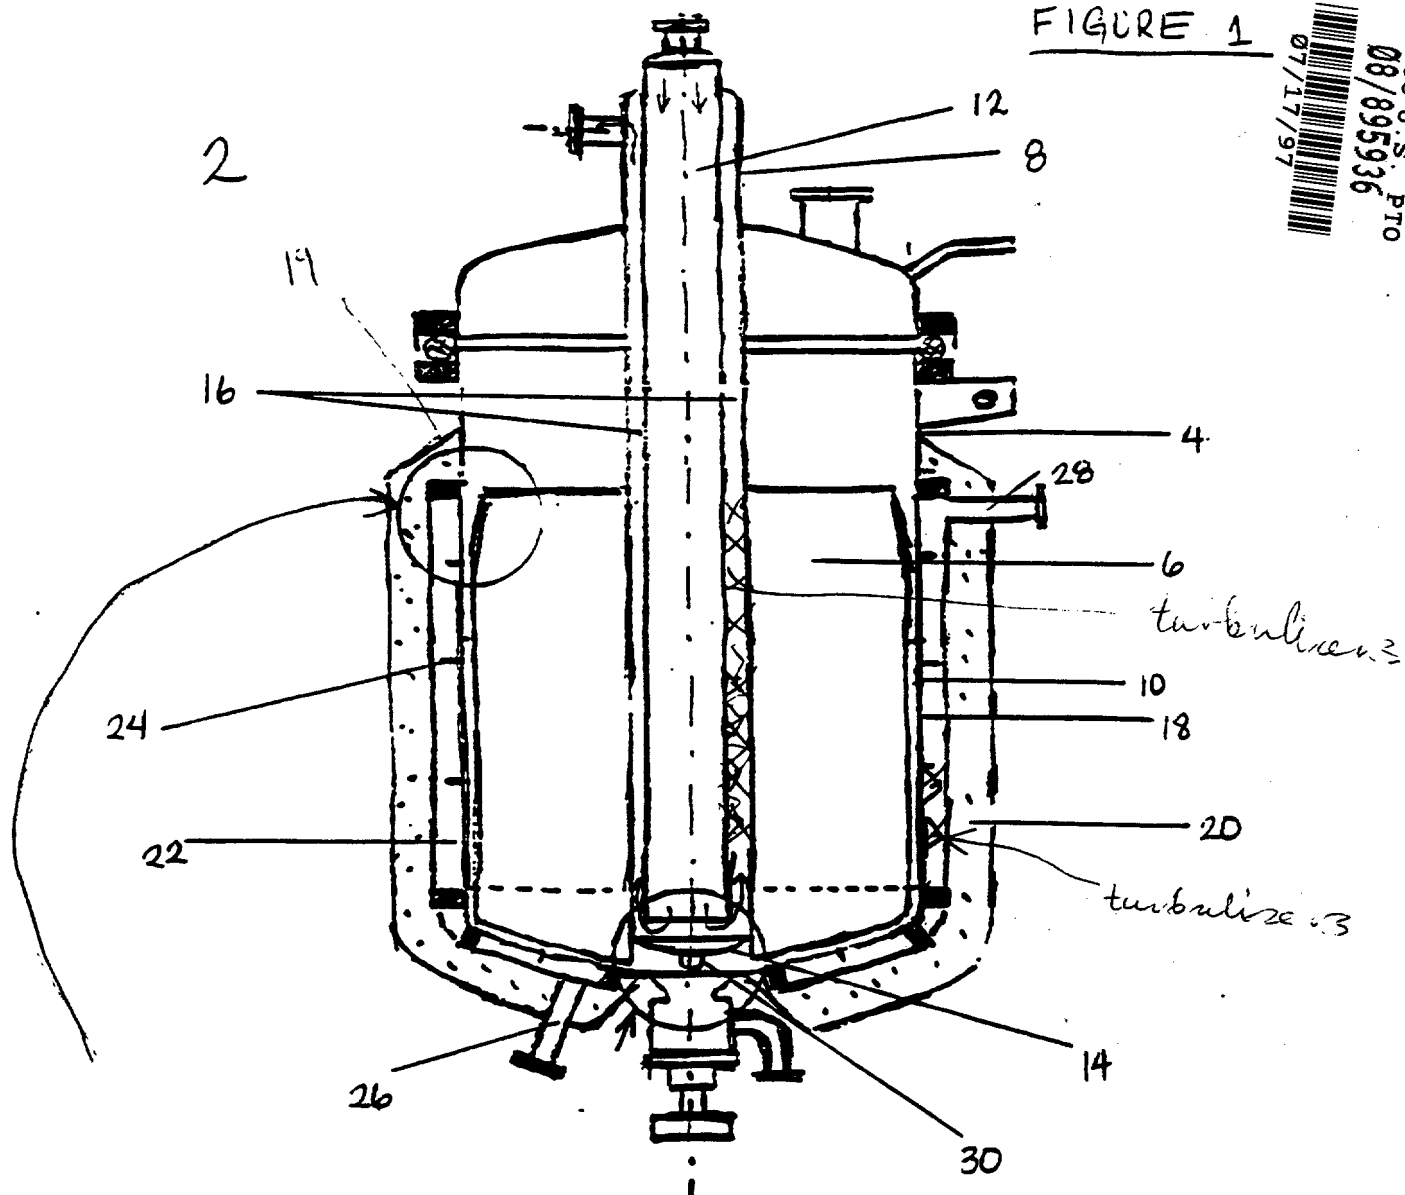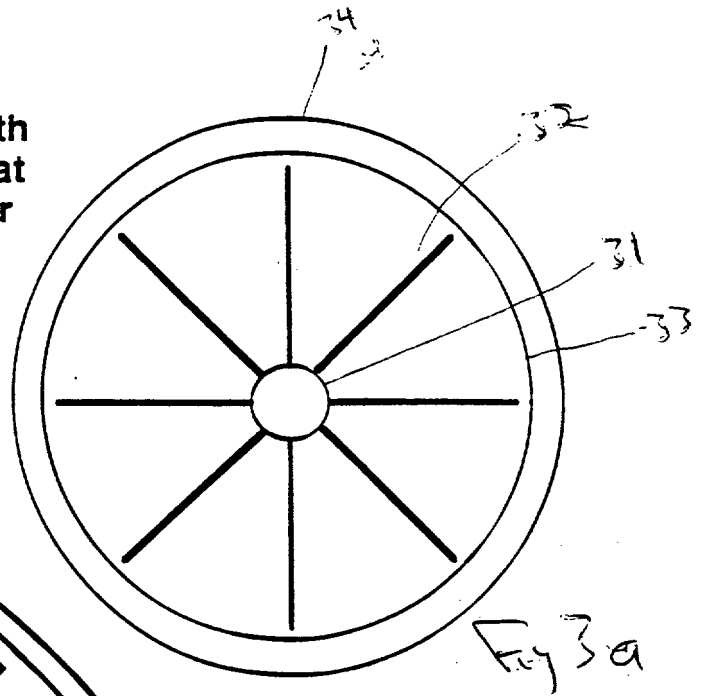


Section

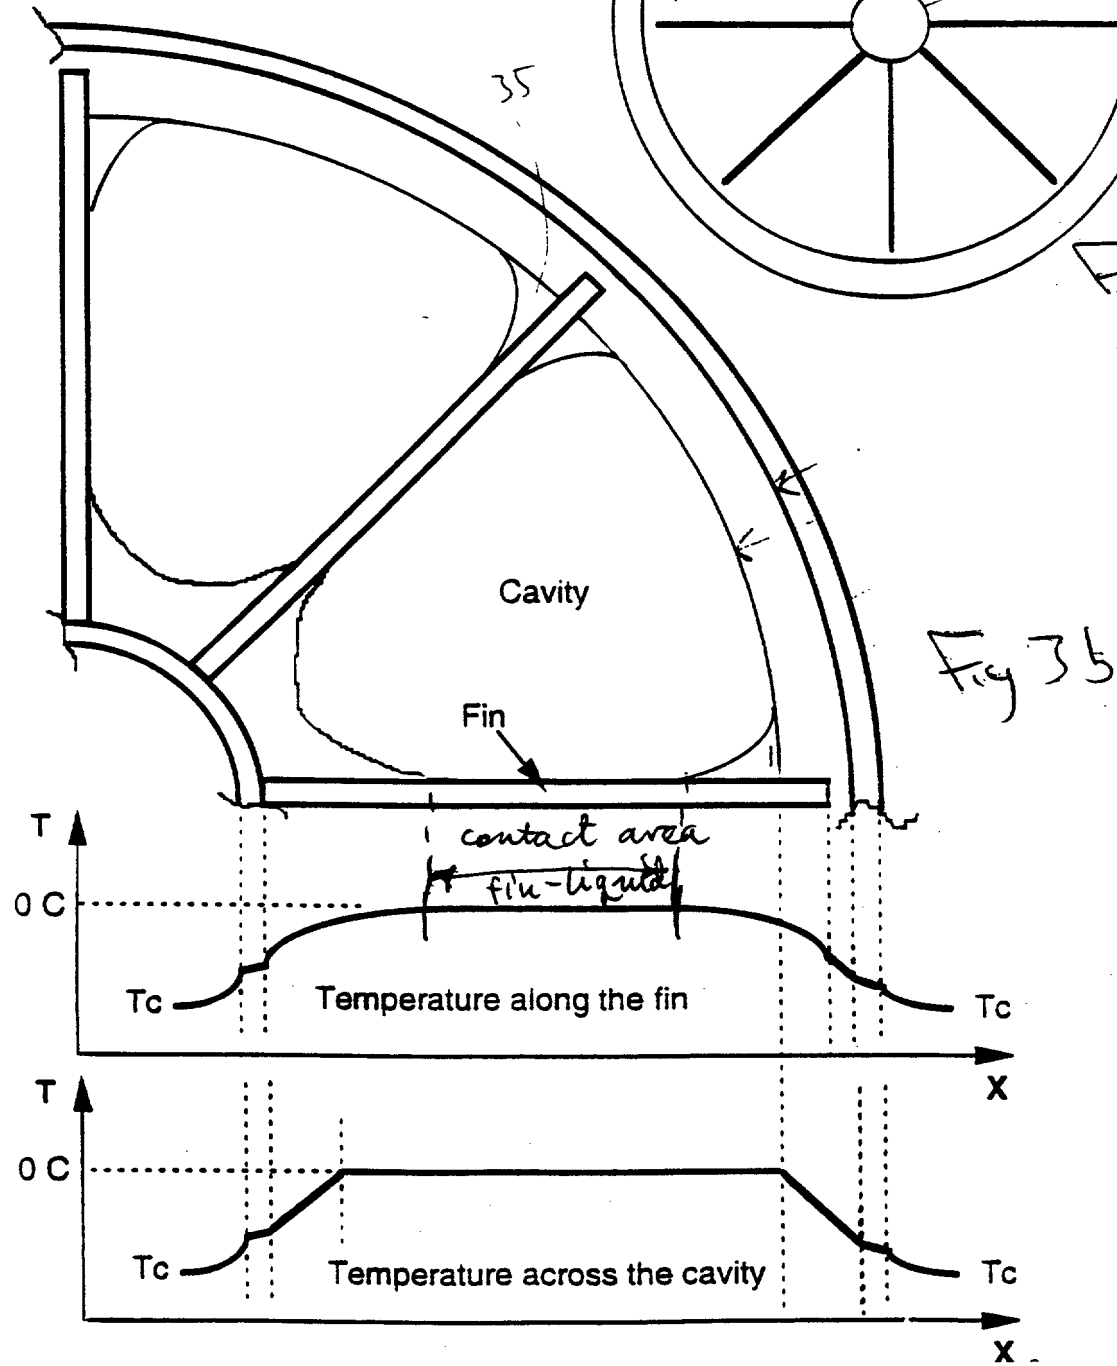

262720 92656880


Dendritic Ice Growth

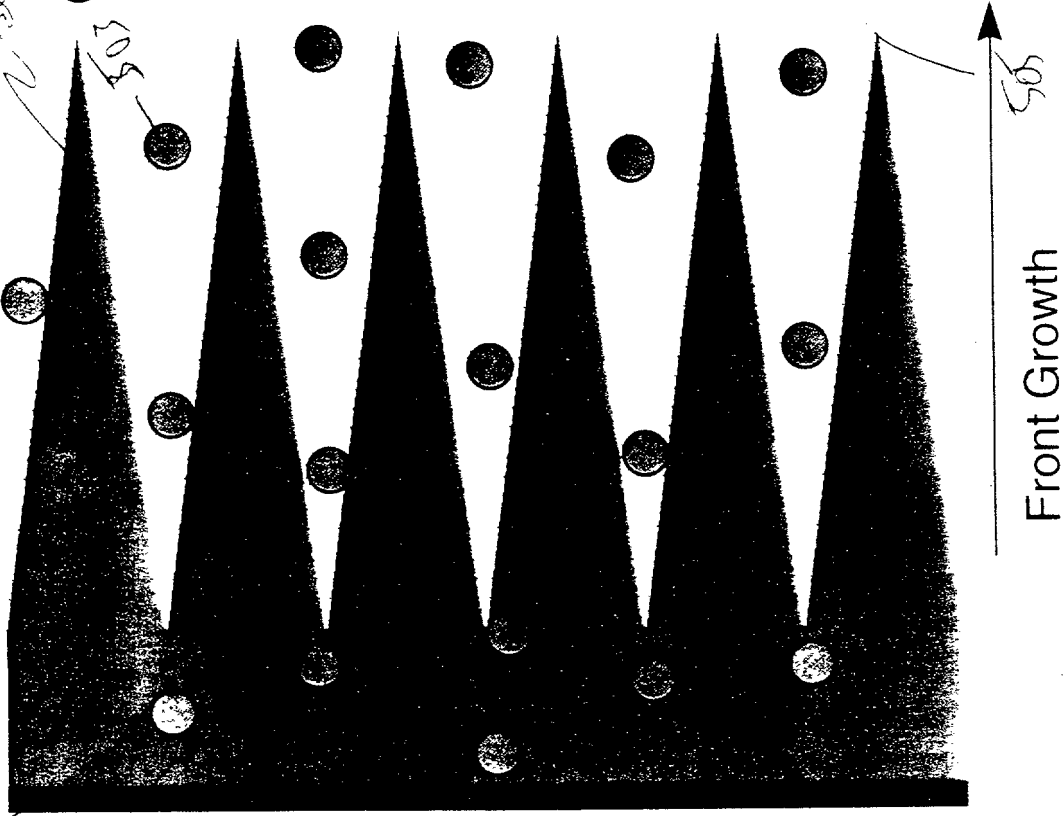Heat
Removal

Section of the vessel with internal finned Heat exchanger

→ acts as a "cold wall"

R.W.

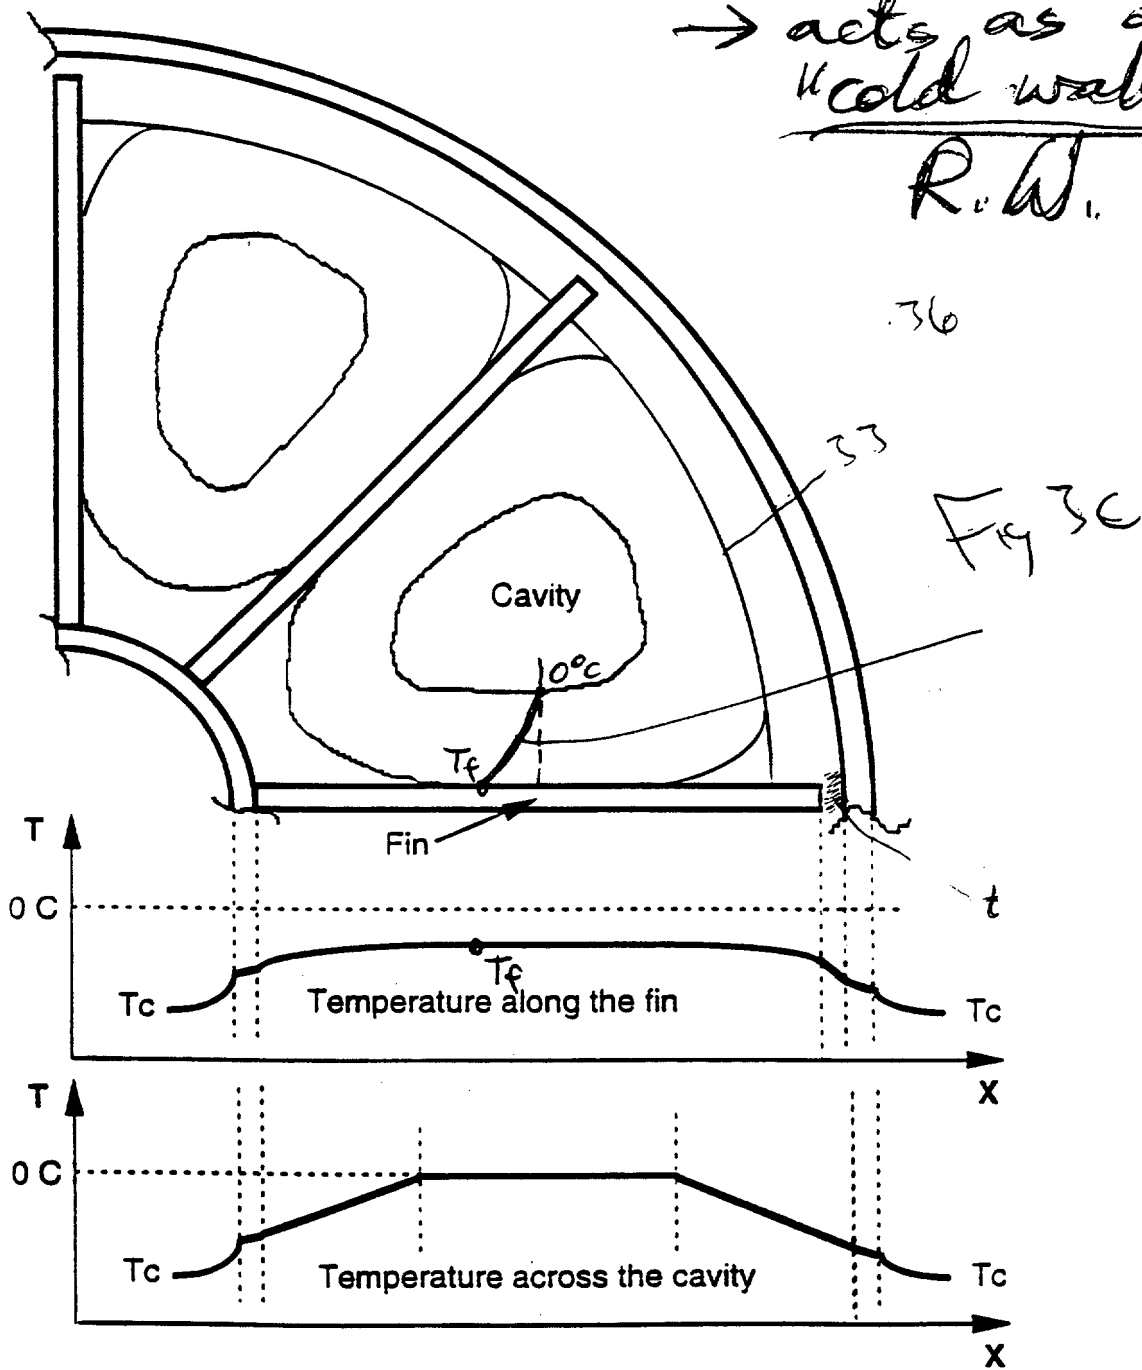

—


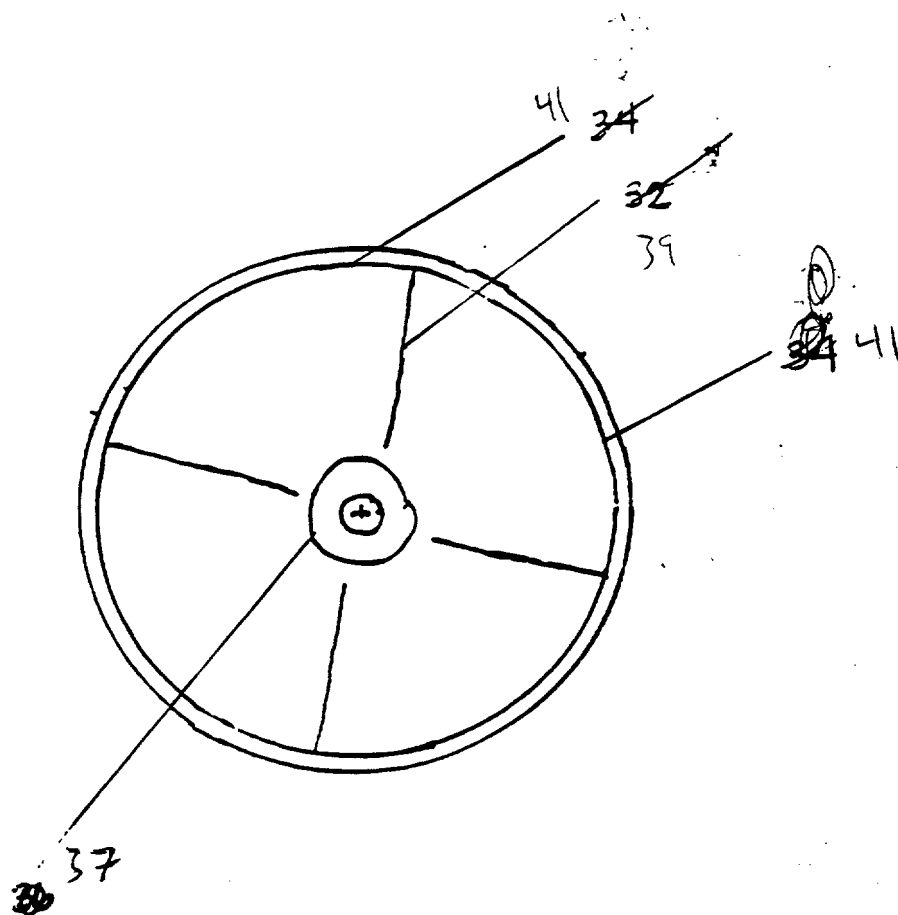


FIGURE 34

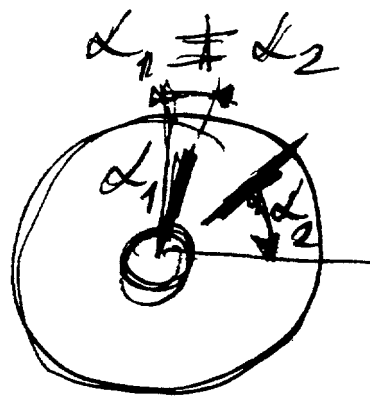

$\alpha_1 \approx \alpha_2$
or
 $\alpha_1 \neq \alpha_2$

38

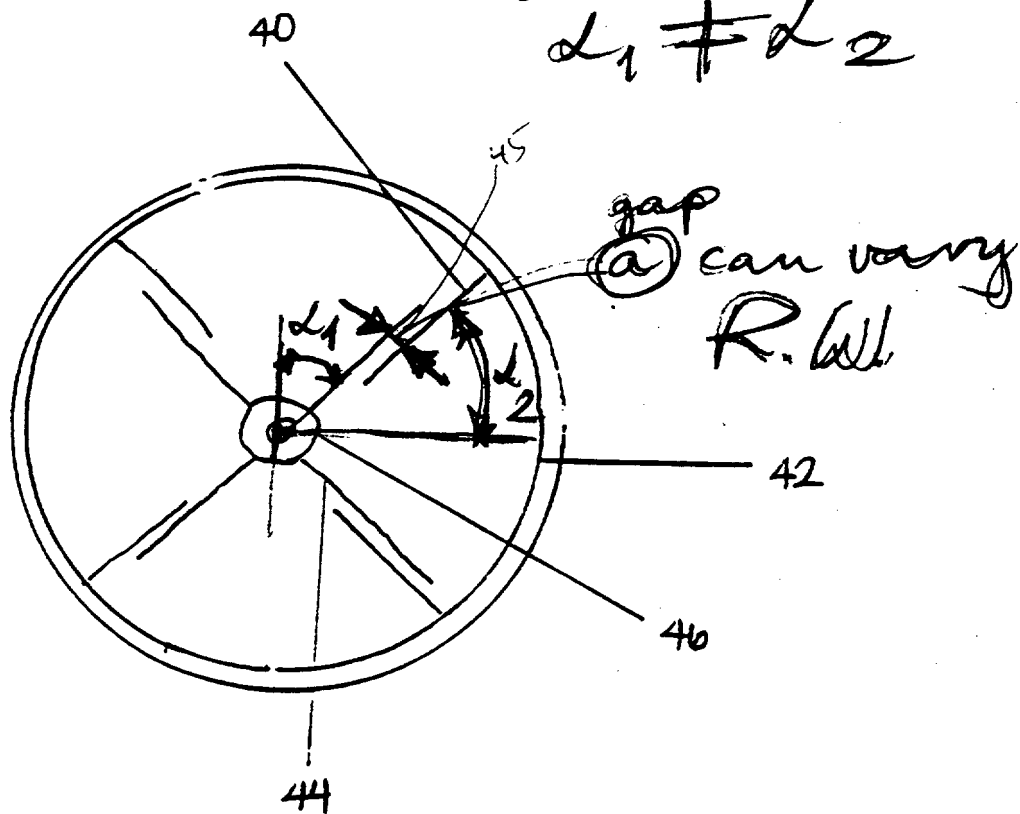


FIGURE 4⁵

267720-96656880

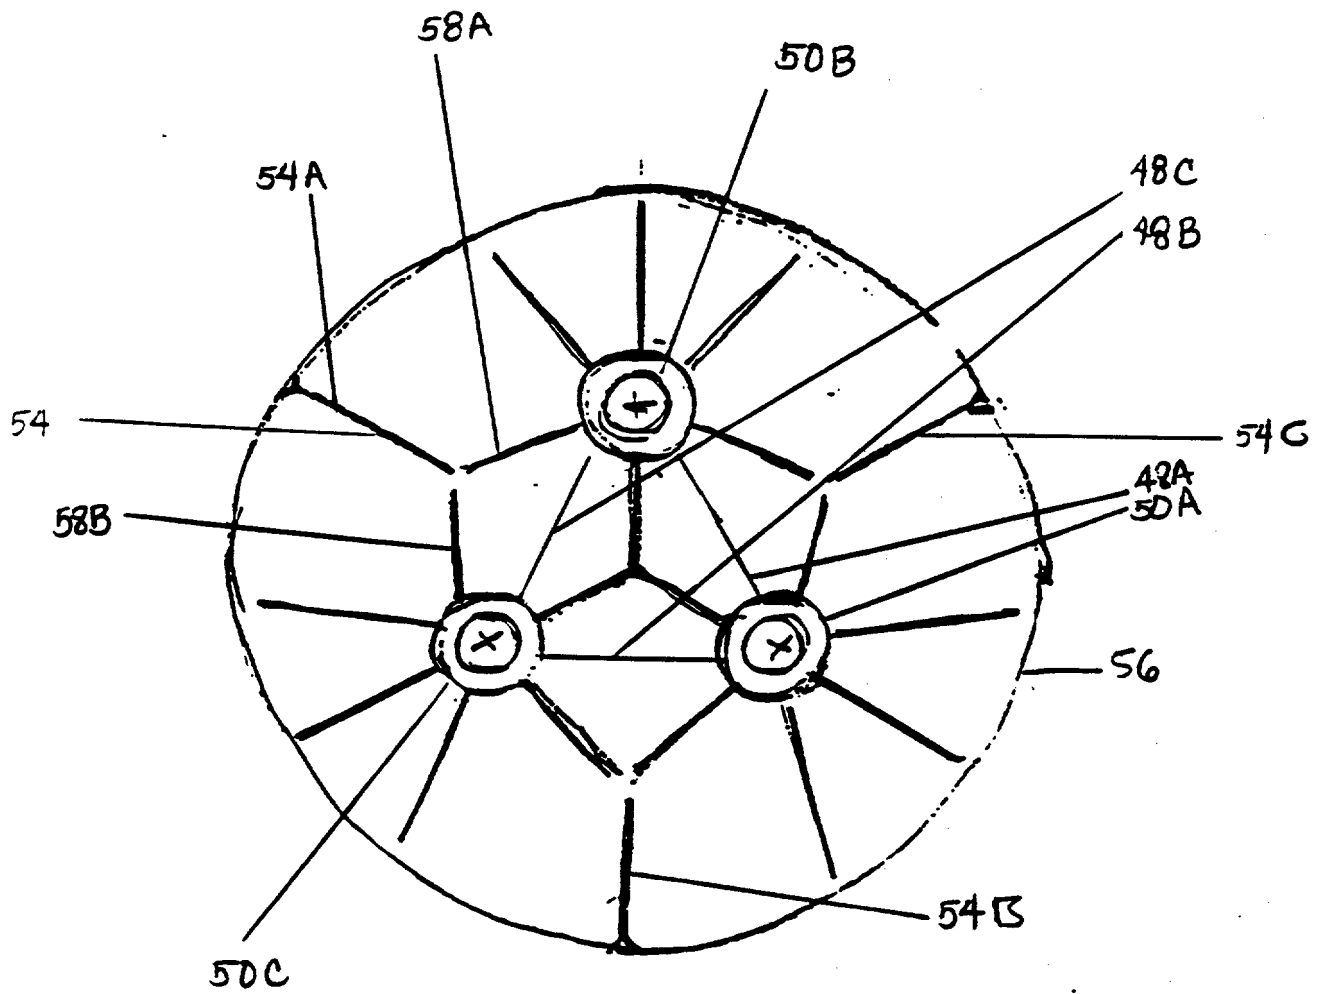



FIGURE 5⁶

(started in pencil
R.W.)

General: Include in descriptions
the fins with change in thickness
For example:

PATENT
Attorney Docket
No. 17882.702


R.W.

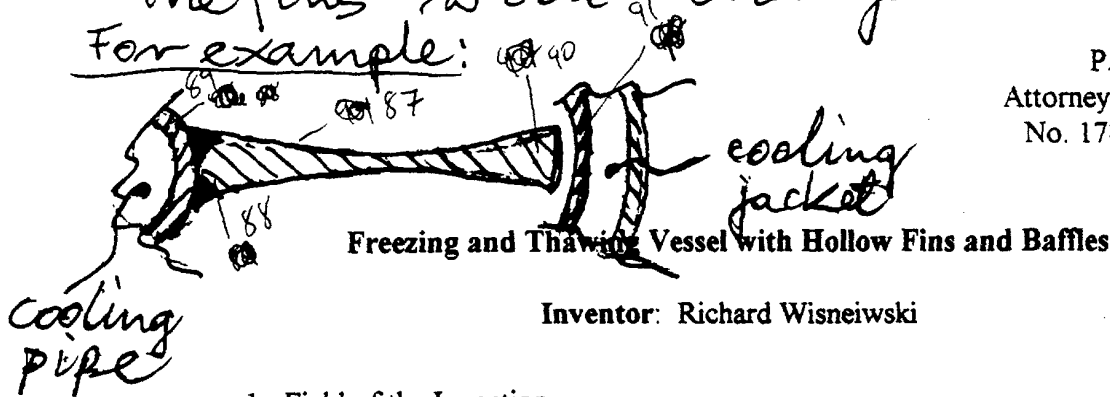

1. Field of the Invention


Fig 9

Also a profiled fin

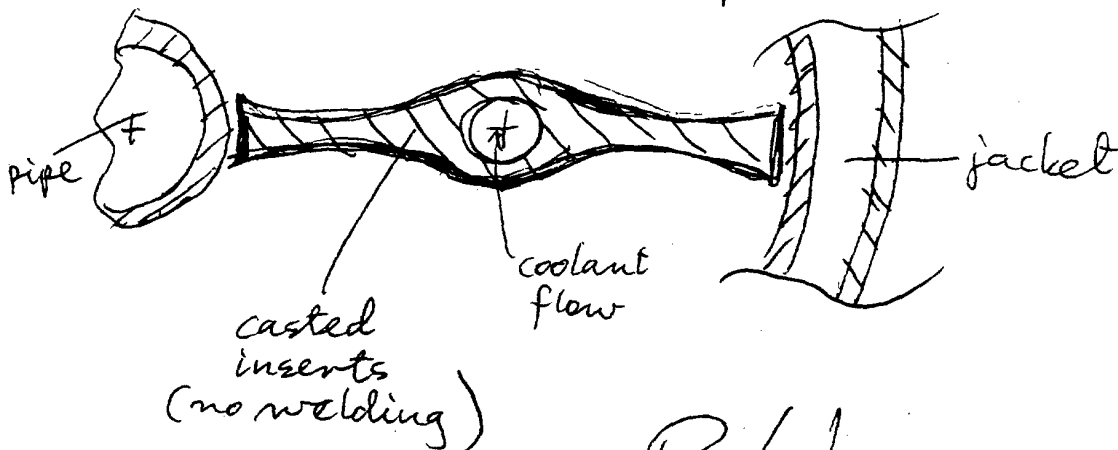


R.W.

Casted inserts can be simpler

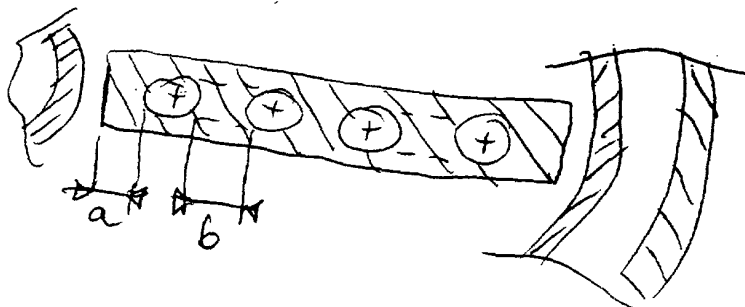

$a = b$
or $a \neq b$

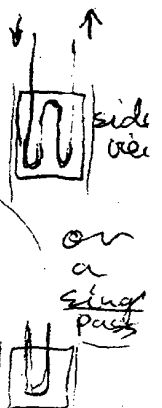

BY: R. WISNIEWSKI

June 16, 1997


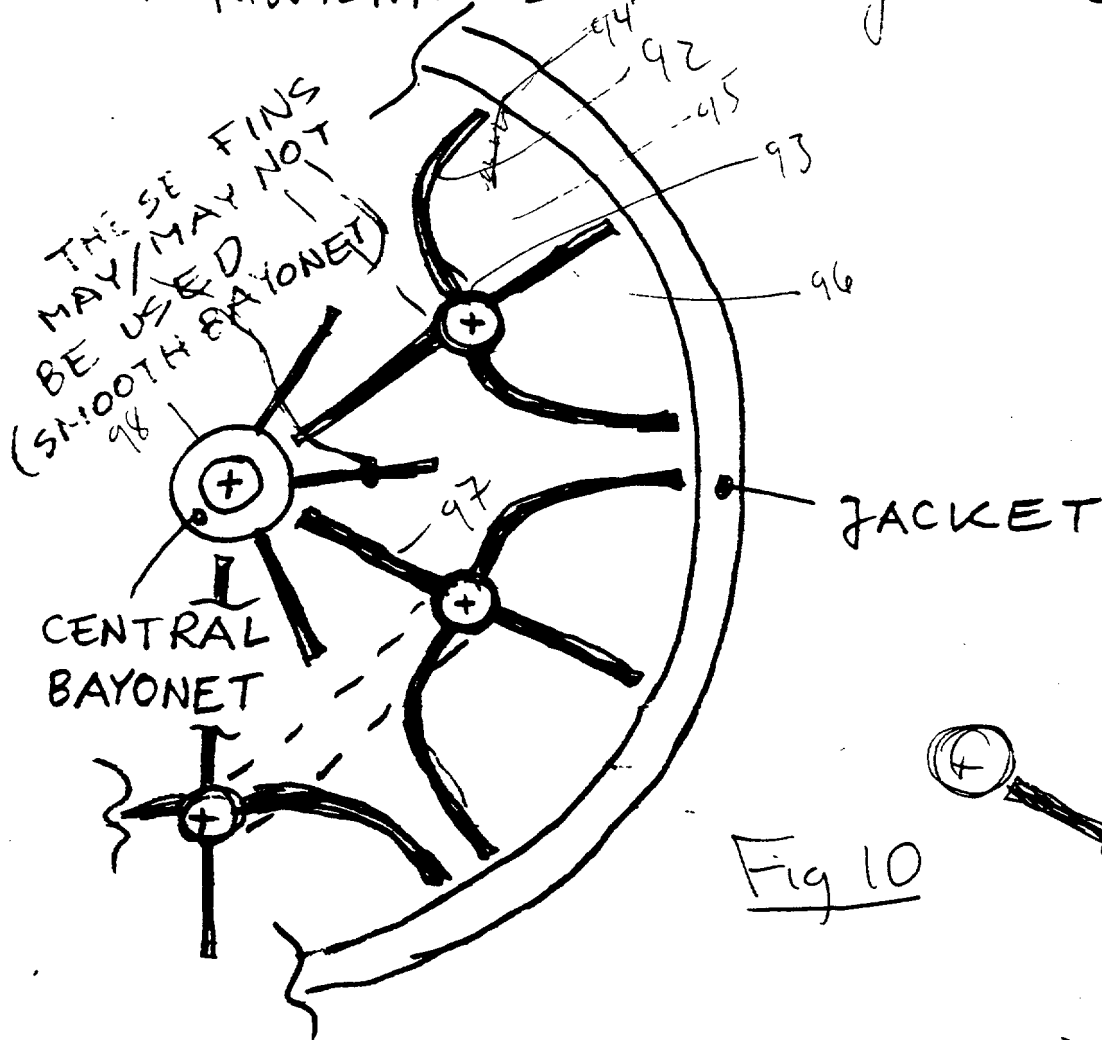


Fig 10






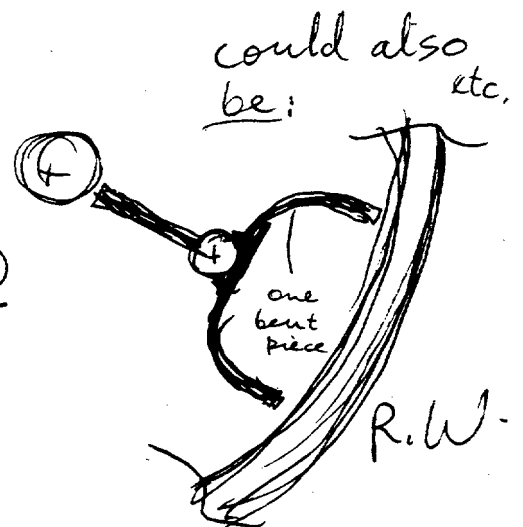


CONCEPT OF CREATING
COMPARTMENTS USING
BENT FINS.

Richard Wisniewski


08895936-071797

22-141 50 SHEETS
 22-142 100 SHEETS
 22-144 200 SHEETS

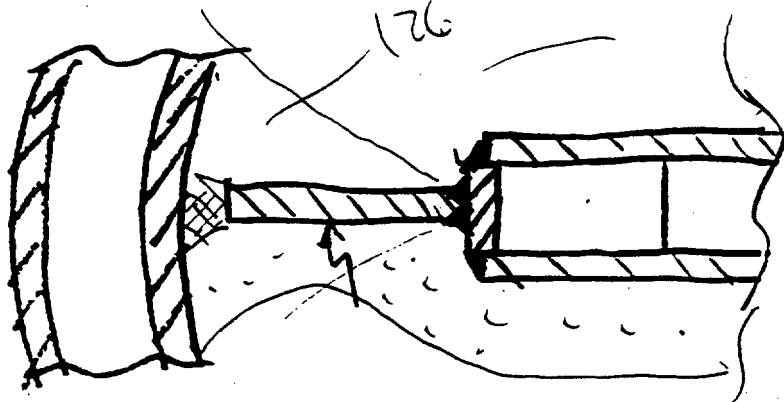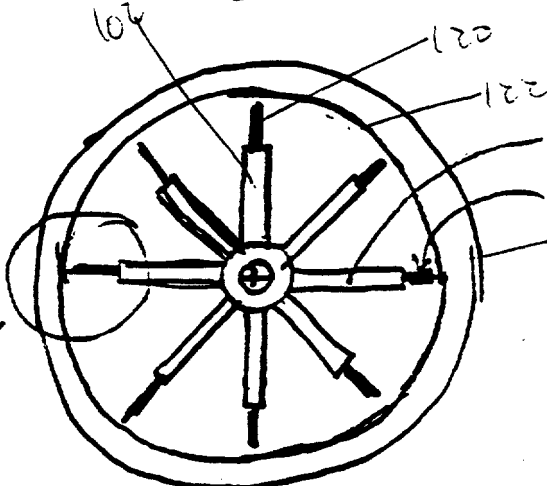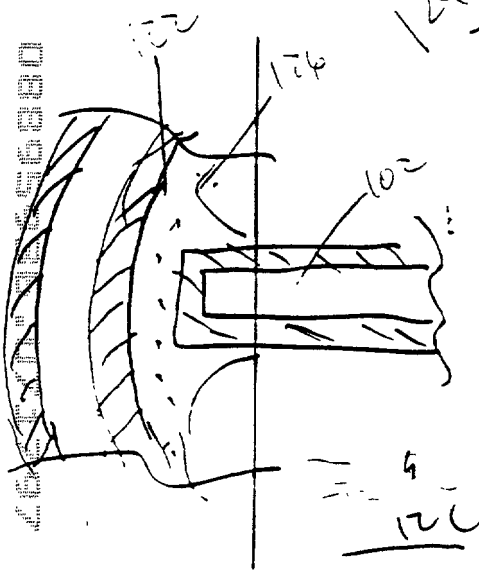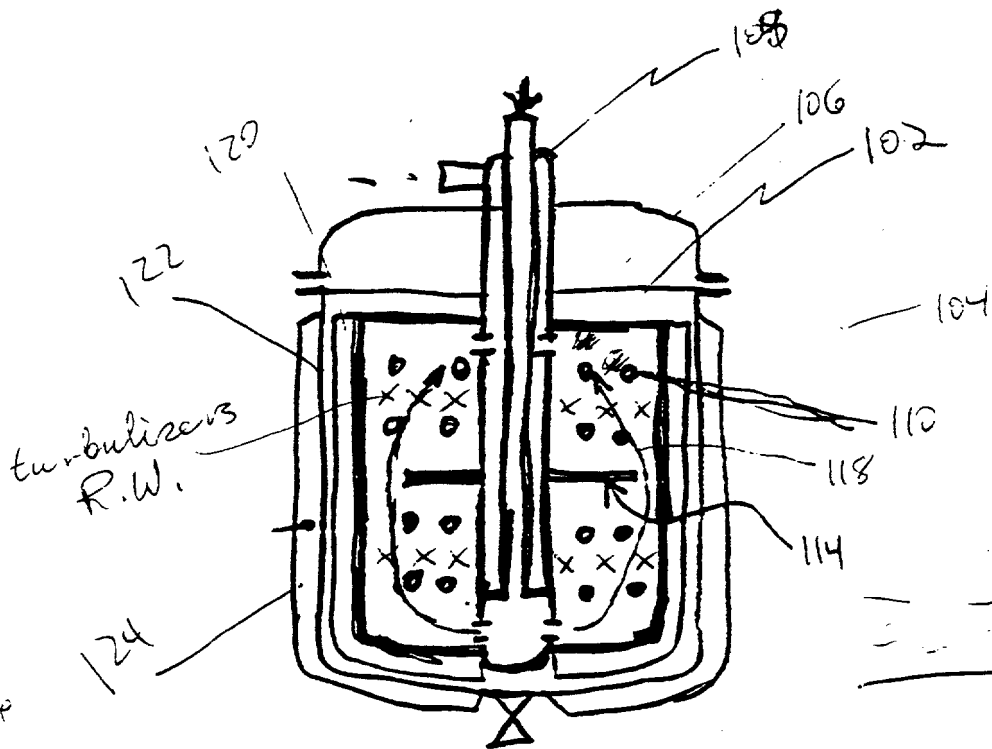


262720-92656880


22-141 50 SHEETS
22-142 100 SHEETS
22-144 200 SHEETS

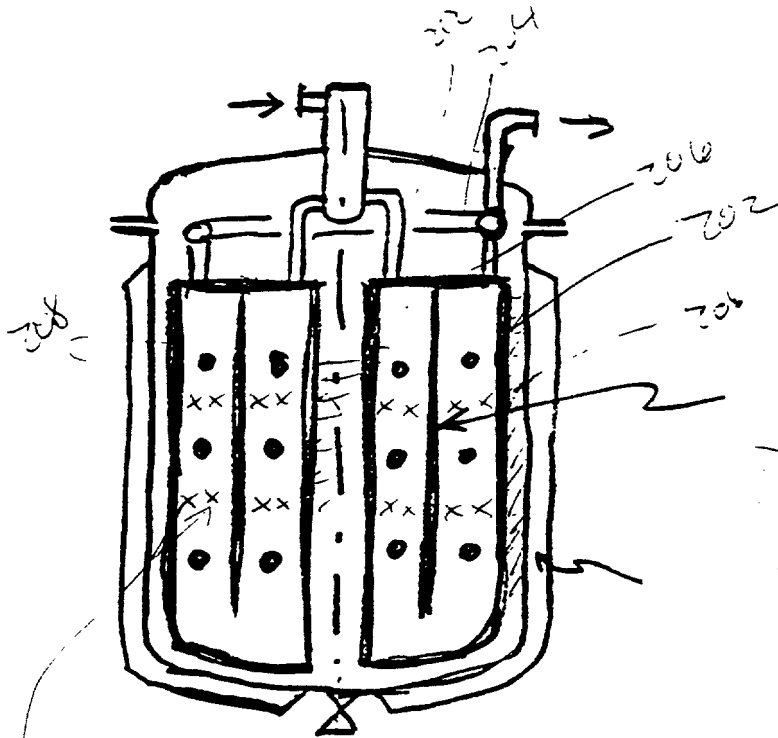

Possible
turbulizers

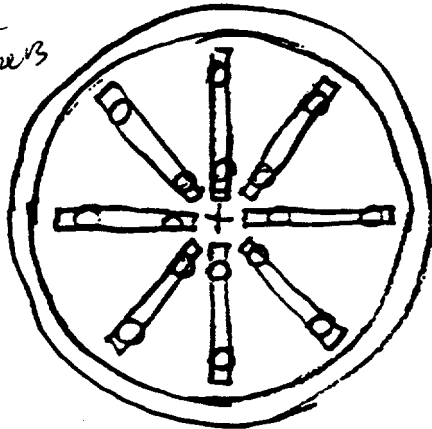

Plates
R.W.

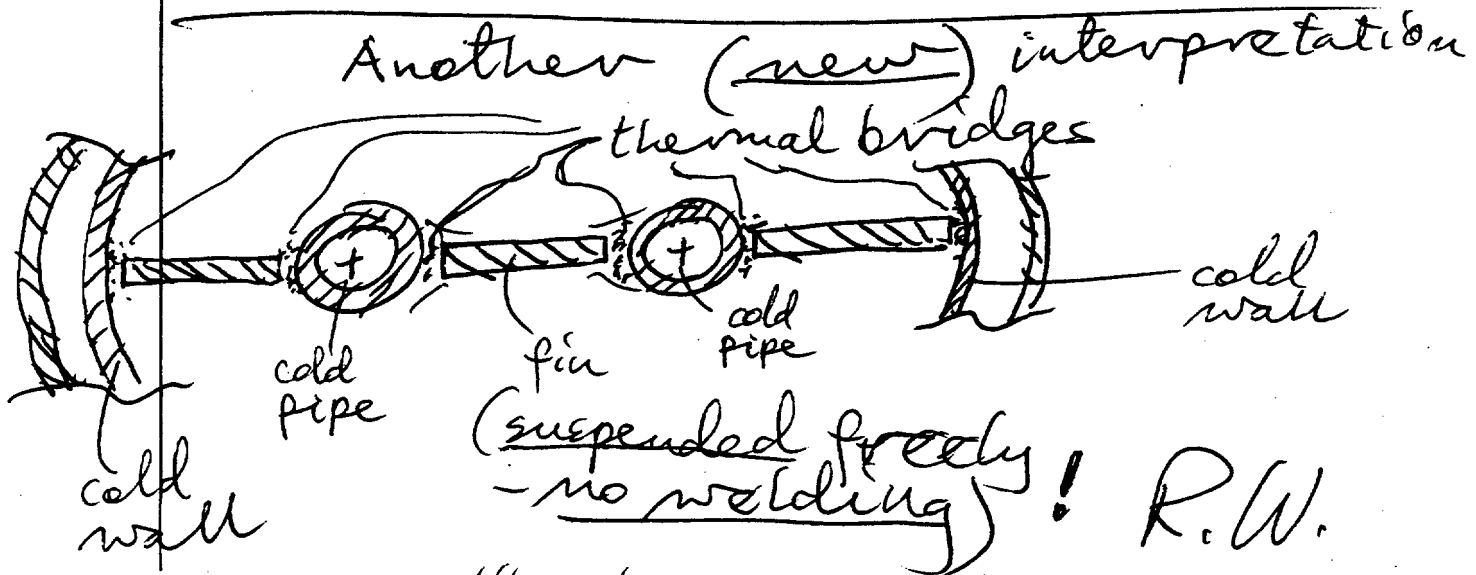

see 68 file

R.W.

Ext. fins

Int.
fins

Bayonet

310

314

308

302

-316

Jacket

-314-

coil

14

you

Do include
other than round
pipes (oval, etc)

flattened

etc.


Jacket

Large
diameter
Vessel

Top view

fin suspended
R.W.

R. W.

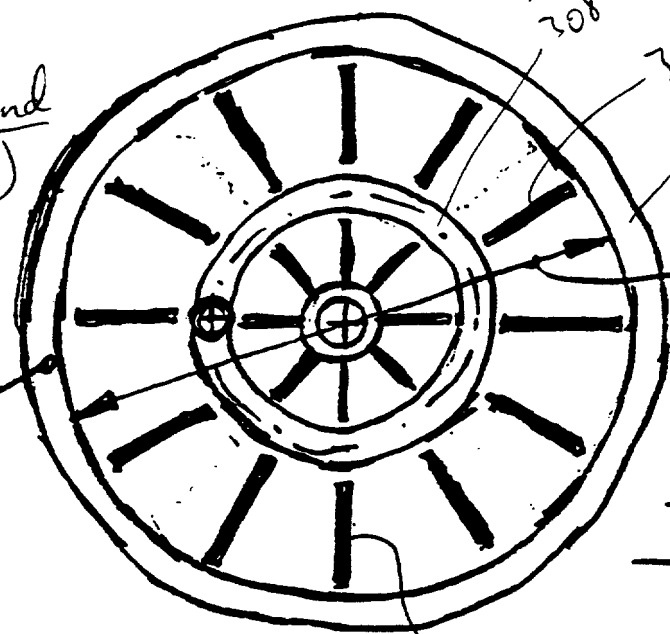


0895936-07197

42 381 50 SHEETS 3 SQUARE
42 382 100 SHEETS 3 SQUARE
42 383 200 SHEETS 3 SQUARE
42 384 400 SHEETS 3 SQUARE
42 385 800 SHEETS 3 SQUARE
42 386 1600 SHEETS 3 SQUARE
42 387 3200 SHEETS 3 SQUARE
42 388 6400 SHEETS 3 SQUARE
42 389 12800 SHEETS 3 SQUARE
42 390 25600 SHEETS 3 SQUARE
42 391 51200 SHEETS 3 SQUARE
42 392 102400 SHEETS 3 SQUARE
42 393 204800 SHEETS 3 SQUARE
42 394 409600 SHEETS 3 SQUARE
42 395 819200 SHEETS 3 SQUARE
42 396 1638400 SHEETS 3 SQUARE
42 397 3276800 SHEETS 3 SQUARE
42 398 6553600 SHEETS 3 SQUARE
42 399 13107200 SHEETS 3 SQUARE
42 400 26214400 SHEETS 3 SQUARE
42 401 52428800 SHEETS 3 SQUARE
42 402 104857600 SHEETS 3 SQUARE
42 403 209715200 SHEETS 3 SQUARE
42 404 419430400 SHEETS 3 SQUARE
42 405 838860800 SHEETS 3 SQUARE
42 406 1677721600 SHEETS 3 SQUARE
42 407 3355443200 SHEETS 3 SQUARE
42 408 6710886400 SHEETS 3 SQUARE
42 409 13421772800 SHEETS 3 SQUARE
42 410 26843545600 SHEETS 3 SQUARE
42 411 53687091200 SHEETS 3 SQUARE
42 412 107374182400 SHEETS 3 SQUARE
42 413 214748364800 SHEETS 3 SQUARE
42 414 429496729600 SHEETS 3 SQUARE
42 415 858993459200 SHEETS 3 SQUARE
42 416 1717986918400 SHEETS 3 SQUARE
42 417 3435973836800 SHEETS 3 SQUARE
42 418 6871947673600 SHEETS 3 SQUARE
42 419 13743895347200 SHEETS 3 SQUARE
42 420 27487790694400 SHEETS 3 SQUARE
42 421 54975581388800 SHEETS 3 SQUARE
42 422 109951162777600 SHEETS 3 SQUARE
42 423 219902325555200 SHEETS 3 SQUARE
42 424 439804651110400 SHEETS 3 SQUARE
42 425 879609302220800 SHEETS 3 SQUARE
42 426 1759218604441600 SHEETS 3 SQUARE
42 427 3518437208883200 SHEETS 3 SQUARE
42 428 7036874417766400 SHEETS 3 SQUARE
42 429 14073748835532800 SHEETS 3 SQUARE
42 430 28147497671065600 SHEETS 3 SQUARE
42 431 56294995342131200 SHEETS 3 SQUARE
42 432 112589990684262400 SHEETS 3 SQUARE
42 433 225179981368524800 SHEETS 3 SQUARE
42 434 450359962737049600 SHEETS 3 SQUARE
42 435 900719925474099200 SHEETS 3 SQUARE
42 436 1801439850948198400 SHEETS 3 SQUARE
42 437 3602879701896396800 SHEETS 3 SQUARE
42 438 7205759403792793600 SHEETS 3 SQUARE
42 439 14411518807585587200 SHEETS 3 SQUARE
42 440 28823037615171174400 SHEETS 3 SQUARE
42 441 57646075230342348800 SHEETS 3 SQUARE
42 442 115292150460684697600 SHEETS 3 SQUARE
42 443 230584300921369395200 SHEETS 3 SQUARE
42 444 461168601842738790400 SHEETS 3 SQUARE
42 445 922337203685477580800 SHEETS 3 SQUARE
42 446 1844674407370955161600 SHEETS 3 SQUARE
42 447 3689348814741910323200 SHEETS 3 SQUARE
42 448 7378697629483820646400 SHEETS 3 SQUARE
42 449 14757395258967641292800 SHEETS 3 SQUARE
42 450 29514790517935282585600 SHEETS 3 SQUARE
42 451 59029581035870565171200 SHEETS 3 SQUARE
42 452 118059162071741130342400 SHEETS 3 SQUARE
42 453 236118324143482260684800 SHEETS 3 SQUARE
42 454 472236648286964521369600 SHEETS 3 SQUARE
42 455 944473296573929042739200 SHEETS 3 SQUARE
42 456 1888946593147858085478400 SHEETS 3 SQUARE
42 457 3777893186295716170956800 SHEETS 3 SQUARE
42 458 7555786372591432341913600 SHEETS 3 SQUARE
42 459 15111572745182864683827200 SHEETS 3 SQUARE
42 460 30223145490365729367654400 SHEETS 3 SQUARE
42 461 60446290980731458735308800 SHEETS 3 SQUARE
42 462 120892581961462917470617600 SHEETS 3 SQUARE
42 463 241785163922925834941235200 SHEETS 3 SQUARE
42 464 483570327845851669882470400 SHEETS 3 SQUARE
42 465 967140655691703339764940800 SHEETS 3 SQUARE
42 466 1934281311383406679529881600 SHEETS 3 SQUARE
42 467 3868562622766813359059763200 SHEETS 3 SQUARE
42 468 7737125245533626718119526400 SHEETS 3 SQUARE
42 469 15474250491067253436239052800 SHEETS 3 SQUARE
42 470 30948500982134506872478105600 SHEETS 3 SQUARE
42 471 61897001964269013744956211200 SHEETS 3 SQUARE
42 472 123794003928538027489912422400 SHEETS 3 SQUARE
42 473 247588007857076054979824844800 SHEETS 3 SQUARE
42 474 495176015714152109959649689600 SHEETS 3 SQUARE
42 475 990352031428304219919299379200 SHEETS 3 SQUARE
42 476 1980704062856608439838598758400 SHEETS 3 SQUARE
42 477 3961408125713216879677197516800 SHEETS 3 SQUARE
42 478 7922816251426433759354395033600 SHEETS 3 SQUARE
42 479 15845632502852867518708790067200 SHEETS 3 SQUARE
42 480 31691265005705735037417580134400 SHEETS 3 SQUARE
42 481 63382530011411470074835160268800 SHEETS 3 SQUARE
42 482 126765060022822940149670320537600 SHEETS 3 SQUARE
42 483 253530120045645880299340641075200 SHEETS 3 SQUARE
42 484 507060240091291760598681282150400 SHEETS 3 SQUARE
42 485 1014120480182583521197362564300800 SHEETS 3 SQUARE
42 486 2028240960365167042394725128601600 SHEETS 3 SQUARE
42 487 4056481920730334084789450257203200 SHEETS 3 SQUARE
42 488 8112963841460668169578900514406400 SHEETS 3 SQUARE
42 489 16225927682921336339157801028812800 SHEETS 3 SQUARE
42 490 32451855365842672678315602057625600 SHEETS 3 SQUARE
42 491 64903710731685345356631204115251200 SHEETS 3 SQUARE
42 492 129807421463370690713262408230502400 SHEETS 3 SQUARE
42 493 259614842926741381426524816461004800 SHEETS 3 SQUARE
42 494 519229685853482762853049632922009600 SHEETS 3 SQUARE
42 495 1038459371706965525706099265844019200 SHEETS 3 SQUARE
42 496 2076918743413931051412198531688038400 SHEETS 3 SQUARE
42 497 4153837486827862102824397063376076800 SHEETS 3 SQUARE
42 498 8307674973655724205648794126752153600 SHEETS 3 SQUARE
42 499 16615349947311448411297588253504307200 SHEETS 3 SQUARE
42 500 33230699894622896822595176507008614400 SHEETS 3 SQUARE
42 501 66461399789245793645190353014017228800 SHEETS 3 SQUARE
42 502 132922799578491587290380706028034457600 SHEETS 3 SQUARE
42 503 265845599156983174580761412056068915200 SHEETS 3 SQUARE
42 504 531691198313966349161522824112137830400 SHEETS 3 SQUARE
42 505 1063382396627932698323045648224275660800 SHEETS 3 SQUARE
42 506 2126764793255865396646091296448551321600 SHEETS 3 SQUARE
42 507 4253529586511730793292182592897102643200 SHEETS 3 SQUARE
42 508 8507059173023461586584365185794205286400 SHEETS 3 SQUARE
42 509 17014118346046923173168730371588410572800 SHEETS 3 SQUARE
42 510 34028236692093846346337460743176821145600 SHEETS 3 SQUARE
42 511 68056473384187692692674921486353642291200 SHEETS 3 SQUARE
42 512 136112946768375385385349842972707284582400 SHEETS 3 SQUARE
42 513 272225893536750770770699685945414569164800 SHEETS 3 SQUARE
42 514 544451787073501541541399371890829138329600 SHEETS 3 SQUARE
42 515 1088903574147003083082798743781658276659200 SHEETS 3 SQUARE
42 516 2177807148294006166165597487563316553318400 SHEETS 3 SQUARE
42 517 4355614296588012332331194975126633106636800 SHEETS 3 SQUARE
42 518 8711228593176024664662389950253266213273600 SHEETS 3 SQUARE
42 519 17422457186352049329324779900506532426547200 SHEETS 3 SQUARE
42 520 34844914372704098658649559801013064853094400 SHEETS 3 SQUARE
42 521 69689828745408197317299119602026129706188800 SHEETS 3 SQUARE
42 522 139379657490816394634598239204052259412377600 SHEETS 3 SQUARE
42 523 278759314981632789269196478408104518824755200 SHEETS 3 SQUARE
42 524 557518629963265578538392956816209037649510400 SHEETS 3 SQUARE
42 525 1115037259926531157076785913632418075299020800 SHEETS 3 SQUARE
42 526 2230074519853062314153571827264836150598041600 SHEETS 3 SQUARE
42 527 4460149039706124628307143654529672301196083200 SHEETS 3 SQUARE
42 528 8920298079412249256614287309059344602392166400 SHEETS 3 SQUARE
42 529 17840596158824498513228574618118689204784332800 SHEETS 3 SQUARE
42 530 35681192317648997026457149236237378409568665600 SHEETS 3 SQUARE
42 531 71362384635297994052914298472474756819137331200 SHEETS 3 SQUARE
42 532 142724769270595988105828596944949513638274662400 SHEETS 3 SQUARE
42 533 285449538541191976211657193889899027276549324800 SHEETS 3 SQUARE
42 534 570899077082383952423314387779798054553098649600 SHEETS 3 SQUARE
42 535 1141798154164767904846628775559596109106197299200 SHEETS 3 SQUARE
42 536 2283596308329535809693257551119192218212394598400 SHEETS 3 SQUARE
42 537 4567192616659071619386515102238384436424789196800 SHEETS 3 SQUARE
42 538 9134385233318143238773030204476768872849578393600 SHEETS 3 SQUARE
42 539 18268770466636286477546060408953537745699156787200 SHEETS 3 SQUARE
42 540 36537540933272572955092120817907075491398313574400 SHEETS 3 SQUARE
42 541 73075081866545145910184241635814150982796627148800 SHEETS 3 SQUARE
42 542 146150163733090291820368483271628301965593254297600 SHEETS 3 SQUARE
42 543 292300327466180583640736966543256603931186508595200 SHEETS 3 SQUARE
42 544 584600654932361167281473933086513207862373017190400 SHEETS 3 SQUARE
42 545 1169201309864722334562947866173026415724746034380800 SHEETS 3 SQUARE
42 546 2338402619729444669125895732346052831449492068761600 SHEETS 3 SQUARE
42 547 4676805239458889338251791464692105662898984137523200 SHEETS 3 SQUARE
42 548 9353610478917778676503582929384211325797968275046400 SHEETS 3 SQUARE
42 549 18707220957835557353007165858768422651595936550092800 SHEETS 3 SQUARE
42 550 37414441915671114706014331717536845303191873100185600 SHEETS 3 SQUARE
42 551 74828883831342229412028663435073690606383746200371200 SHEETS 3 SQUARE
42 552 149657767662684458824057326870147381212767492400742400 SHEETS 3 SQUARE
42 553 299315535325368917648114653740294762425534984801484800 SHEETS 3 SQUARE
42 554 598631070650737835296229307480589524851069969602969600 SHEETS 3 SQUARE
42 555 1197262141301475670592458614961179049702139939205939200 SHEETS 3 SQUARE
42 556 2394524282602951341184917229922358099404279878411878400 SHEETS 3 SQUARE
42 557 4789048565205902682369834459844716198808559756823756800 SHEETS 3 SQUARE
42 558 9578097130411805364739668919689432397617119513647513600 SHEETS 3 SQUARE
42 559 19156194260823610729479337839378864795234239027295027200 SHEETS 3 SQUARE
42 560 38312388521647221458958675678757729590468478054590054400 SHEETS 3 SQUARE
42 561 76624777043294442917917351357515459180936956109180108800 SHEETS 3 SQUARE
42 562 153249554086588885835834702715030918361873912218360217600 SHEETS 3 SQUARE
42 563 306499108173177771671669405430061836723747824436720435200 SHEETS 3 SQUARE
42 564 612998216346355543343338810860123673447495648873440870400 SHEETS 3 SQUARE
42 565 1225996432692711086686677621720247346894991297746881740800 SHEETS 3 SQUARE
42 566 2451992865385422173373355243440494693789982595493763481600 SHEETS 3 SQUARE
42 567 4903985730770844346746710486880989387579965190987526963200 SHEETS 3 SQUARE
42 568 9807971461541688693493420973761978775159930381975053926400 SHEETS 3 SQUARE
42 569 19615942923083377386986841947523957550319860763950107852800 SHEETS 3 SQUARE
42 570 39231885846166754773973683895047915100639721527900215705600 SHEETS 3 SQUARE
42 571 78463771692333509547947367790095830201279443055800431411200 SHEETS 3 SQUARE
42 572 156927543384667019095894735580191660402558886111600862822400 SHEETS 3 SQUARE
42 573 313855086769334038191789471160383320805117772223201725644800 SHEETS 3 SQUARE
42 574 627710173538668076383578942320766641610235544446403451289600 SHEETS 3 SQUARE
42 575 1255420347077336152767157884641533283220471088892806902579200 SHEETS 3 SQUARE
42 576 2510840694154672305534315769283066566440942177785613805158400 SHEETS 3 SQUARE
42 577 5021681388309344611068631538566133132881884355571227610316800 SHEETS 3 SQUARE
42 578 10043362776618689222137263077132266265763768711142455220633600 SHEETS 3 SQUARE
42 579 20086725553237378444274526154264532531527537422284910441267200 SHEETS 3 SQUARE
42 580 40173451106474756888549052308529065063055074844569820882534400 SHEETS 3 SQUARE
42 581 80346902212949513777098104617058130126110149689139641765068800 SHEETS 3 SQUARE
42 582 160693804425899027554196209234116260252220299378279283530137600 SHEETS 3 SQUARE
42 583 321387608851798055108392418468232520504440598756558567060275200 SHEETS 3 SQUARE
42 584 642775217703596110216784836936465041008881197513117134120550400 SHEETS 3 SQUARE
42 585 1285550435407192220433569673872930082017762395026234268241100800 SHEETS 3 SQUARE
42 586 2571100870814384440867139347745860164035524790052468536482201600 SHEETS 3 SQUARE
42 587 5142201741628768881734278695491720328071049580104937072964403200 SHEETS 3 SQUARE
42 588 10284403483257537763468557390983440656142099160209874145928806400 SHEETS 3 SQUARE
42 589 20568806966515075526937114781966881312284198320419748291857612800 SHEETS 3 SQUARE
42 590 41137613933030151053874229563933762624568396640839496583715225600 SHEETS 3 SQUARE
42 591 82275227866060302107748459127867525249136793281678993167430451200 SHEETS 3 SQUARE
42 592 164550455732120604215496918255735050498273586563357986334860902400 SHEETS 3 SQUARE
42 593 329100911464241208430993836511470100996547173126715972669721804800 SHEETS 3 SQUARE
42 594 658201822928482416861987673022940201993094346253431945339443609600 SHEETS 3 SQUARE
42 595 1316403645856964833723975346045880403986188692506863890678887219200 SHEETS 3 SQUARE
42 596 2632807291713929667447950692091760807972377385013727781357774438400 SHEETS 3 SQUARE
42 597 5265614583427859334895901384183521615944754770027455562715548876800 SHEETS 3 SQUARE
42 598 10531229166855718669791802768367043231889509540054911125431097753600 SHEETS 3 SQUARE
42 599 21062458333711437339583605536734086463779019080109822250862195507200 SHEETS 3 SQUARE
42 600 42124916667422874679167211073468172927558038160219644501724391014400 SHEETS 3 SQUARE
42 601 84249833334845749358334422146936345855116076320439289003448782028800 SHEETS 3 SQUARE
42 602 168499666669691498716668844293872691710232152640878578006897564057600 SHEETS 3 SQUARE
42 603 336999333339382997433337688587745383420464305281757156013795128115200 SHEETS 3 SQUARE
42 604 673998666678765994866675377175490766840928610563514312027590256230400 SHEETS 3 SQUARE
42 605 1347997333357531989733350754350981533681857221127028624055180512460800 SHEETS 3 SQUARE
42 606 2695994666715063979466701508701963067363714442254057248110361024921600 SHEETS 3 SQUARE
42 607 5391989333430127958933403017403926134727428884508114496220722049843200 SHEETS 3 SQUARE
42 608 10783978666860255917866806034807852269454857769016228992441444099686400 SHEETS 3 SQUARE
42 609 21567957333720511835733612069615704538909715538032457984882888199372800 SHEETS 3 SQUARE
42 610 43135914667441023671467224139231409077819431076064915969765776398745600 SHEETS 3 SQUARE
42 611 86271829334882047342934448278462818155638862152129831939531552797491200 SHEETS 3 SQUARE
42 612 172543658669764094685868896556925636311277724304259663879063105594982400 SHEETS 3 SQUARE
42 613 345087317339528189371737793113851272622555448608519327758126211189964800 SHEETS 3 SQUARE
42 614 690174634679056378743475586227702545245110897217038655516252422379929600 SHEETS 3 SQUARE
42 615 1380349269358112757486951172455405090490221794434077311032504844759859200 SHEETS 3 SQUARE
42 616 2760698538716225514973902344910810180980443588868154622065009689519718400 SHEETS 3 SQUARE
42 617 5521397077432451029947804689821620361960887177736309244130019379039436800 SHEETS 3 SQUARE
42 618 11042794154864902059895609379643240723921774355


Double thermal bridges
R.W.


Details:

Details:
Thermal bridges:

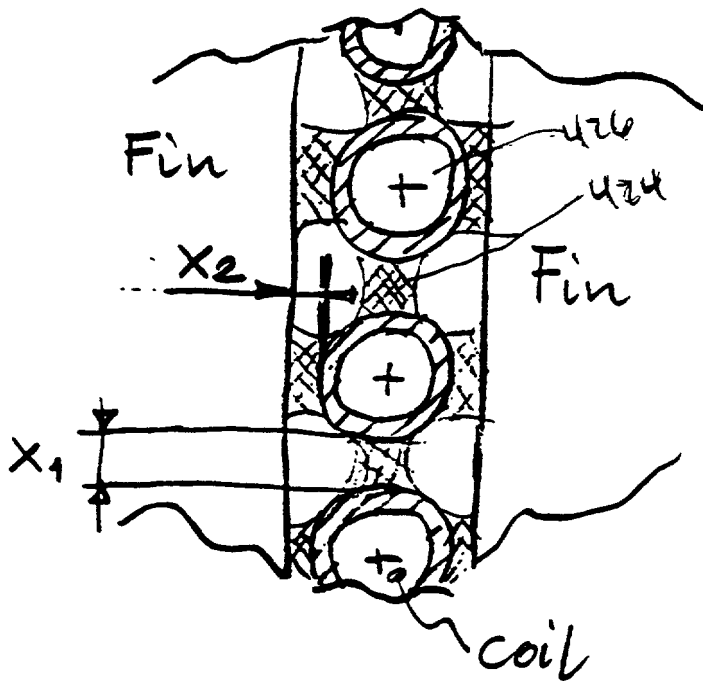

15c

 Thermal bridges of solidified material

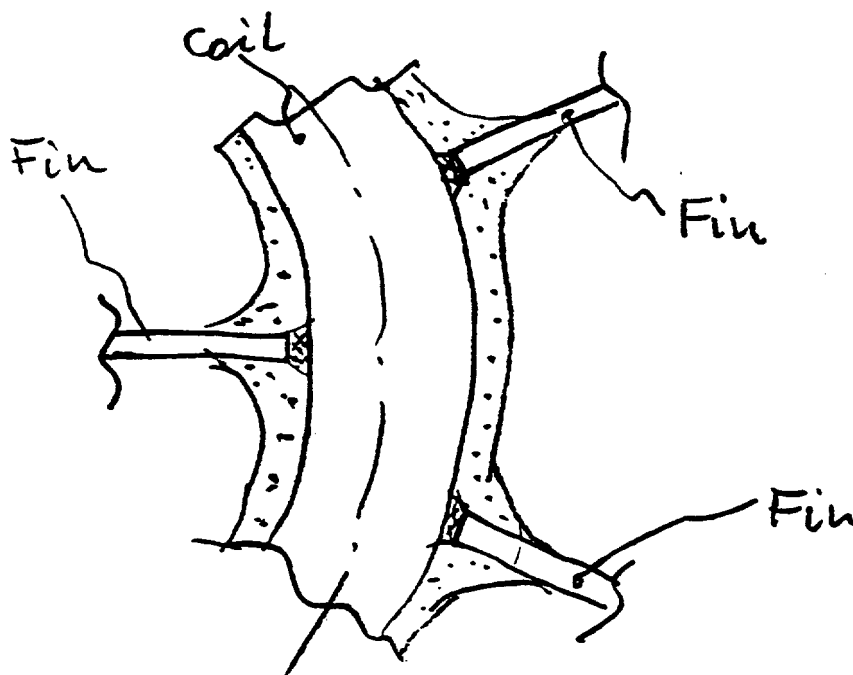
$$x_1, x_2$$
-optimized

Top view

150

Here: also flattened/oval/square
pipes over

To turbulentize the fluid in spiraled pipes ~~(plus)~~ they can be flattened in staggered pattern

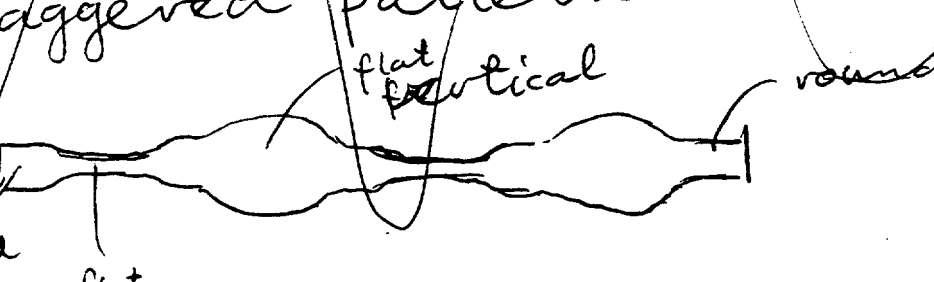

round

flat vertical

flat horizontal

round

16) Therefore: do this (flattened or oval/square pipe

long cooled area

606 604 602 OR 9

flattened pipe

central pipe


(when more fin arrangements) 16a

608

beneficial protrusion when fewer fin arrangements

16b (see the ... about ...)

Flattened/oval/square pipes:

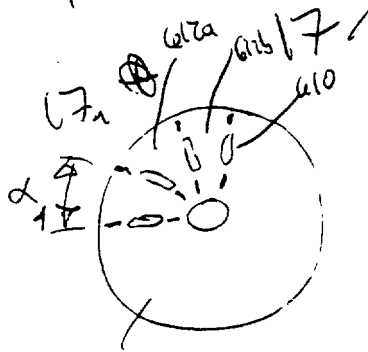

many fin assemblies
(L_1 small)





fewer fin assemblies
(L_2 large)



Advantage of such pipes
→ longer (A) dimension → better compartmentization of space
"longer" areas directly cooled!

Also - flattened/oval/square pipes with welded fins (or casted etc.)

e.g.

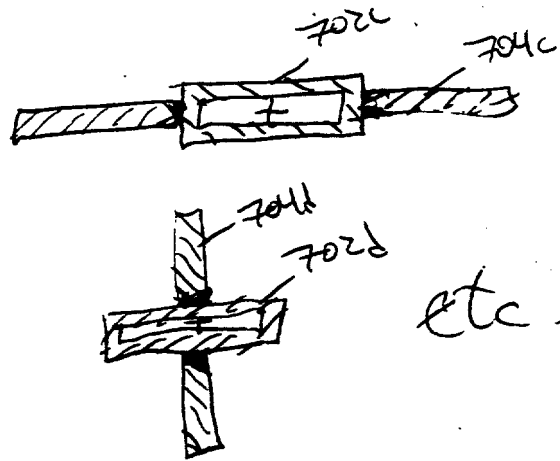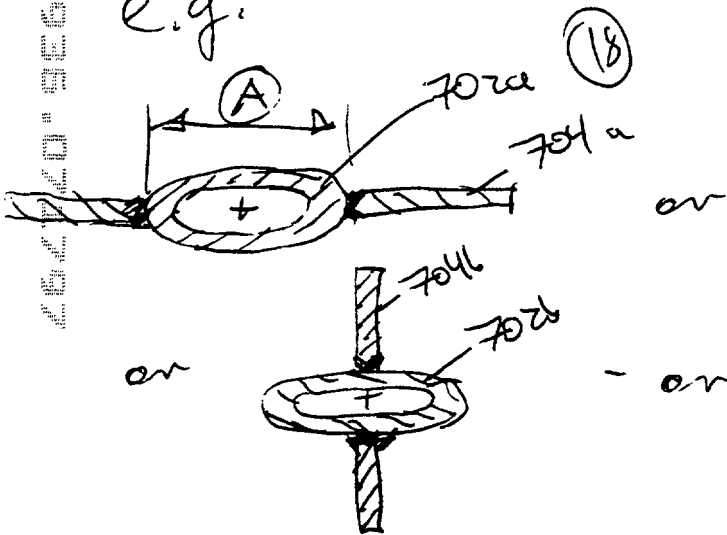


or combined

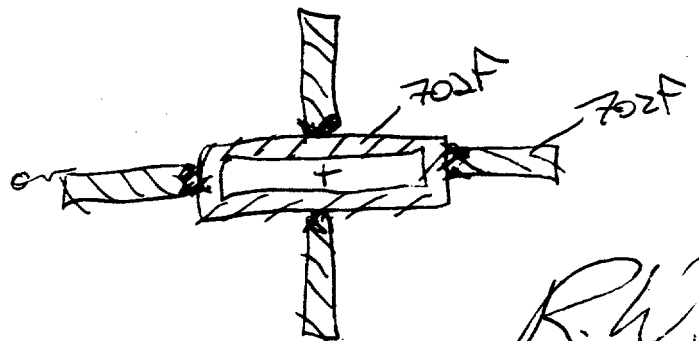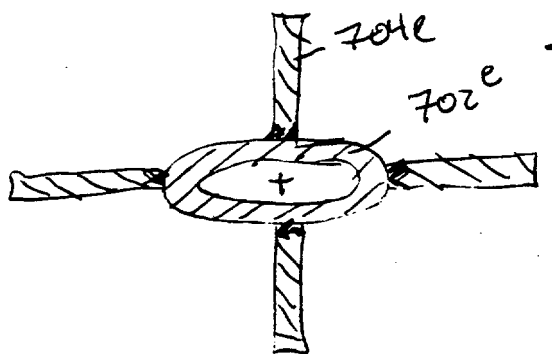

R.W.

(spiral ^{coil} made of flattened pipes)

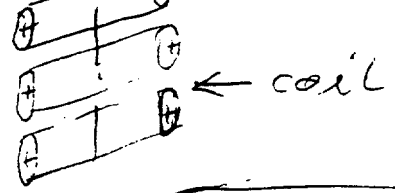


\pm uniform distance
(while for round pipe - not)

better
bridging than
for round pipe!

- long
bridges
(fewer
pipes!
needed)

Flattened/shaped
pipes could be
further explored
for example: a
combination:

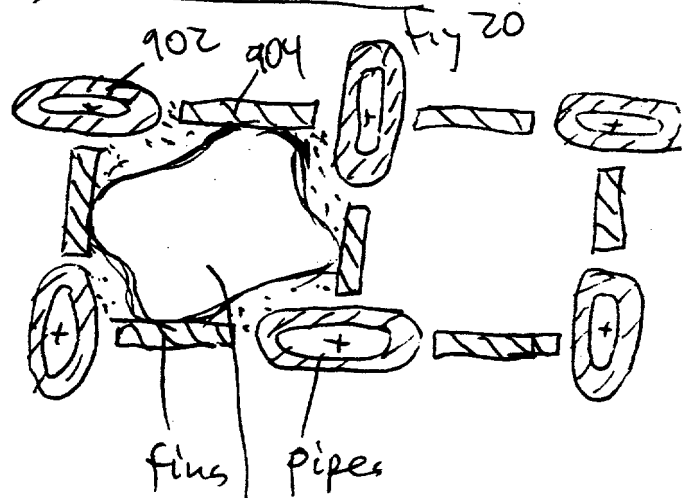

Romboidal
(diamond)
freezing
pattern

R.W.

Purpose - if certain compartmentalization has to be done in large vessels.

Flattened/oval/square pipes
(continued)

2 pipes
(continued)

(spiral ^{coil} made of flattened pipes)

\pm uniform distance
(while for round pipe - not)

better
bridging than
for round pipe!

- long
bridges
(fewer
pipes!
needed)

Flattened/shaped
pipes could be
further explored
for example: a
combination:

Romboidal
(diamond)
freezing
pattern

R.W.

Purpose - if certain compartmentalization has to be done in large vessels.